Teron Lighting

ARCHITECTURAL OUTDOOR

ADAMS HID

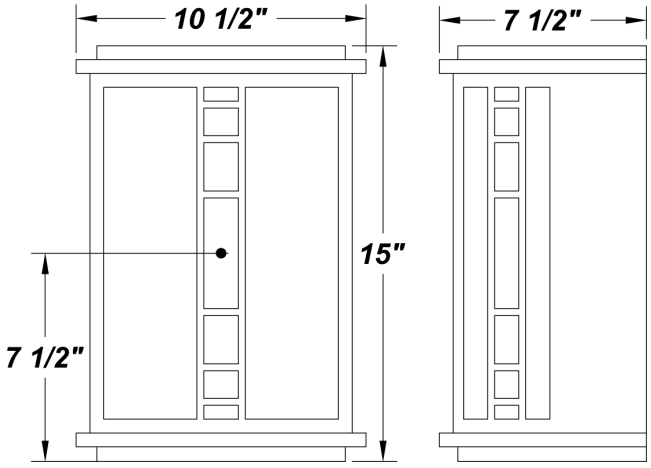

COMPACT FLUORESCENT & HID

PROJECT:	
TYPE:	
ORDERING # :	
COMMENTS:	

FEATURES

- Steel Housing w/ Textured Black Polyester Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Solid Top & Bottom End Plates
- Luminous White Polycarbonate Panels
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (1x32W Max)
- ETL Listed Wet Location

ORDERING INFORMATION

Example : (ADH70MH - 120H - WPL - 41K) **Textured Black is Standard Finish**

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Adams HID	**ADH50MH** - (1) 50W MH **ADH70MH** - (1) 70W MH **ADH100MH** - (1) 100W MH **ADH50** - (1) 50W HPS **ADH70** - (1) 70W HPS **ADH100** - (1) 100W HPS **ADH132X** - (1) 32W TBX **ADH142X** - (1) 42W TBX **ADH157X** - (1) 57W TBX **ADH232X** - (2) 32W TBX	**METAL HALIDE (MH)** **120V** - 120V HPF **120H** - MT HPF (Wired 120V) **MTH** - MT HPF (Wired 277V) **HPS** **120V** - 120V HPF **120H** - MT HPF (Wired 120V) **MTH** - MT HPF (Wired 277V) **(MT - Multi-Tap)** **FLUORESCENT (F)** **120E** - 120V Electronic **277E** - 277V Electronic	**WPL -** White Polycarbonate (Standard) **The Following Are To Be Used With Fluorescent Wattages ONLY** **WAL** - White Acrylic **WBL** - White Alabaster Acrylic	**SM** - Matte Silver **TB** - Textured Black **AC** - Antique Copper **AS** - Antique Silver **BT** - Bronze Mist **CP** - Copper **SN** - Sand **SW** - Swedish Steel **BZ** - Textured Bronze **TW** - Textured White **RAL Colors or Custom Match - Consult Factory**	**41K** - 4100K Color Temp. **35K** - 3500K Color Temp. **27K** - 2700K Color Temp. (Standard) **F** - Fused **PCL** - Photocell **DIM** - Dimming Ballast (Electronic Only) **TP** - Tamper Resistant Screws **QRS** - Quartz Restrike (DC/Bay - Lamp Included) **QRZ** - Quartz Socket Only **EBW / EBC** - Integral Energency Battery** (1x32W Maximum) **EBR** - Remote Mount Battery (Field Installed) **

REPLACEMENT PARTS	PART NO.
White Polycarbonate Lens Panel Set	9800860
White Acrylic Lens Panel Set	9800960
White Alabaster Acrylic Lens Panel Set	9800959

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:
Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC:
Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR:
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009

BUY AMERICA ACT

INTEGRAL BATTERY AVAILABLE

ETL LISTED US

VANDAL RESISTANT

33 DONALD DRIVE FAIRFIELD, OH 45014 PH:(513)858-6004 FAX:(513)858-6038 EMAIL:SALES@TERONLIGHT.COM WEB:TERONLIGHT.COM