

**ALLURE HR-WHITE CIRQUE**




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**FEATURES**

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Decorative Fabric Insert with Clear Acrylic Cover
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Dry Location

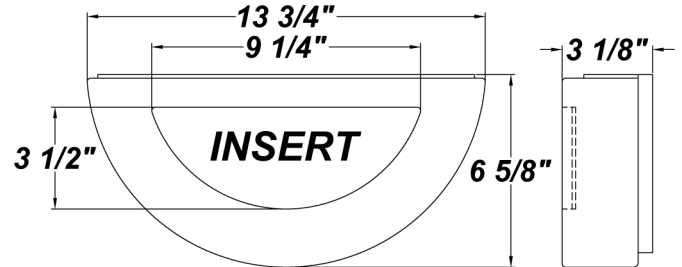

**ORDERING INFORMATION**

Example : (AHR - WE - 118Q - 277E - 35K)

PRODUCT	SOURCE/WATTAGE	VOLTAGE	INSERT DETAIL	FINISH	OPTIONS
AHR-WE					
Allure Half-Round White Cirque	113Q - (1) 13W QE 213Q - (2) 13W QE 118Q - (1) 18W QE 218Q - (2) 18W QE 126Q - (1) 26W QE 226Q - (2) 26W QE	120E - Electronic 277E - Electronic		Not Applicable	41K - 4100K Color Temp. 35K - 3500K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused EBR - Remote Mount Battery (Field Installed)*

**REPLACEMENT PARTS**      **PART NO.**

White Cirque Half-Round Acrylic Lens Assembly      38046

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBR:**

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



**BUY AMERICA ACT**      **ADA Compliant**