


**ALLURE RD - BLUE ABSTRACT**

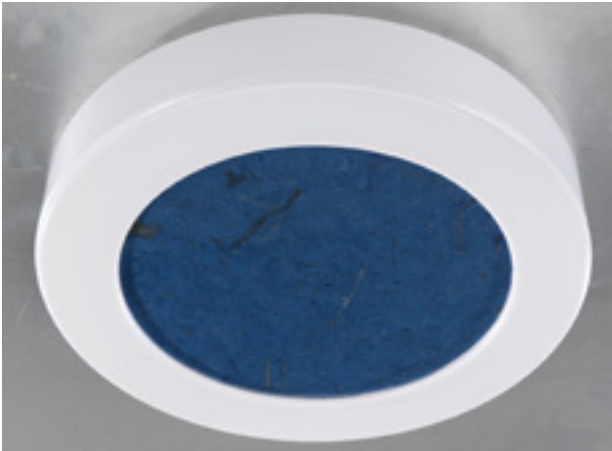


COMPACT FLUORESCENT

|              |
|--------------|
| PROJECT :    |
| TYPE :       |
| ORDERING # : |
| COMMENTS :   |


**FEATURES**

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Decorative Fabric Insert with Clear Acrylic Cover
  - If Wall-Mounted, Shifting / Settling of Insert May Occur
- Mounts Directly to 4" Junction Box (By Others) on Wall or Ceiling
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (Back Box Required)
- ADA compliant
- Dry Location

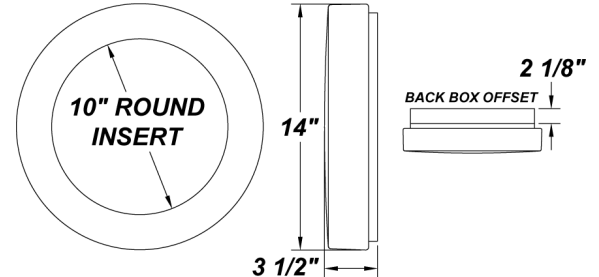

**ORDERING INFORMATION**

Example : (ALR - BA - 213Q - 120E - 41K)
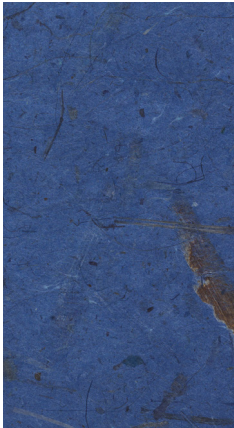
| PRODUCT                       | SOURCE/WATTAGE   | VOLTAGE  | INSERT DETAIL  | FINISH         | OPTIONS  |
|-------------------------------|--|--|--|----------------|--|
| ALR - BA                      |  |  |  |                |  |
| Allure Round<br>Blue Abstract | 213Q - (2) 13W QE<br>218Q - (2) 18W QE<br>226Q - (2) 26W QE<br>122CE - (1) 22W T5 Circ | 120E - Electronic 120V<br>277E - Electronic 277V |  | Not Applicable | 41K - 4100K Color Temp.<br>35K - 3500K Color Temp.<br>30K - 3000K Color Temp.<br>(Standard for 22W & 40W T5 Circ)<br>27K - 2700K Color Temp.<br>(Standard)<br>(Not Available for 22W & 40W T5 Circ)<br>F - Fused<br>TP - Tamper Resistant Screws<br>DIM - Dimming Ballast *<br>(QE Electronic Only)<br>EBR - Remote Mount Battery<br>(Field Installed)**<br>EBW/BB - Integral Emergency Battery** (Back Box Required)<br>BB - Back Box<br>W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) |

**REPLACEMENT PARTS PART NO.**

|                                   |       |
|-----------------------------------|-------|
| Blue Abstract Round Lens Assembly | 38004 |
|-----------------------------------|-------|

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

\*Fluorescent Only

\*\*Emergency Battery Options

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT



ADA Compliant