


ALLURE RD - ESPRESSO

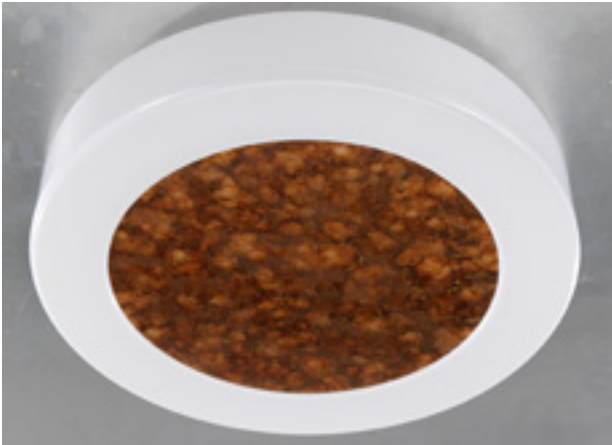


COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Decorative Mixed Resin Insert with Clear Acrylic Cover
- Mounts Directly to 4" Junction Box (By Others) on Wall or Ceiling
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (Back Box Required)
- ADA compliant
- Dry Location

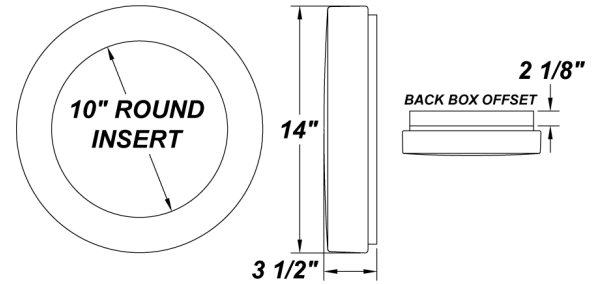

ORDERING INFORMATION

Example : (ALR - EO - 218Q - 120E - 35K)

PRODUCT	SOURCE/WATTAGE	VOLTAGE	INSERT DETAIL	FINISH	OPTIONS
ALR - EO					
Allure Round Espresso	213Q - (2) 13W QE 218Q - (2) 18W QE 226Q - (2) 26W QE 122CE - (1) 22W T5 Circ	120E - Electronic 120V 277E - Electronic 277V		Not Applicable	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. (Standard for 22W & 40W T5 Circ) 27K - 2700K Color Temp. (Standard) (Not Available for 22W & 40W T5 Circ) F - Fused TP - Tamper Resistant Screws DIM - Dimming Ballast * (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)** EBW/BB - Integral Emergency Battery** (Back Box Required) BB - Back Box W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max)

REPLACEMENT PARTS

PART NO.

Espresso Round Acrylic Lens Assembly

38084

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT



NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F