

**ALLURE RD - GRAY ABSTRACT**




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**FEATURES**

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Decorative Fabric Insert with Clear Acrylic Cover
  - If Wall-Mounted, Shifting / Settling of Insert May Occur
- Mounts Directly to 4" Junction Box (By Others) on Wall or Ceiling
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (Back Box Required)
- ADA compliant
- Dry Location

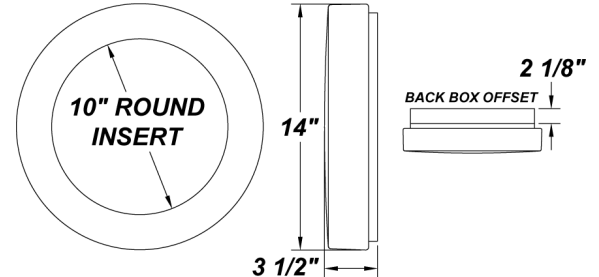

**ORDERING INFORMATION**

Example : (ALR - GA - 226Q - 277E - 35K)

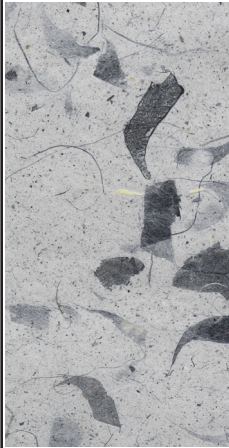PRODUCT	SOURCE/WATTAGE	VOLTAGE	INSERT DETAIL	FINISH	OPTIONS
ALR - GA					
<b>Allure Round Gray Abstract</b>	213Q - (2) 13W QE 218Q - (2) 18W QE 226Q - (2) 26W QE 122CE - (1) 22W T5 Circ	120E - Electronic 120V 277E - Electronic 277V		Not Applicable	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. (Standard for 22W & 40W T5 Circ) 27K - 2700K Color Temp. (Standard) (Not Available for 22W & 40W T5 Circ) F - Fused TP - Tamper Resistant Screws DIM - Dimming Ballast * (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)** EBW/BB - Integral Emergency Battery** (Back Box Required) BB - Back Box W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max)

**REPLACEMENT PARTS**      **PART NO.**

Gray Abstract Round Acrylic Lens Assembly	38006
---	-------

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Fluorescent Only**

**\*\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:**

Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

**EBR:**

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

**ARRA 2009**



**BUY AMERICA ACT**



**ADA Compliant**