

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


APPLEBY



LINEAR FLUORESCENT

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- White Marble Acrylic End Caps
- Lamps Not Included (Except For 13W 2-Pin Biax Magnetic)
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- ADA Compliant
- ETL Listed Damp Location

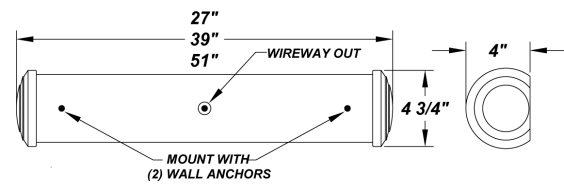

ORDERING INFORMATION

Example : (AY24217E - 120E) White Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
AY24 (24" Fixture)	AY24117E - (1) 17W T8 AY24217E - (2) 17W T8 AY24214E - (2) 14W T5 AY24224E-HO* - (2) 24W T5	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	Optional End Cap Colors Available - Consult Factory For Details & Pricing	F - Fused EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only) W2L - Wire 2 Lamps to Integral Emergency Battery DIM - Dimming Ballast (T8 Lamping Only)
AY36 (36" Fixture)	AY36125E - (1) 25W T8 AY36225E - (2) 25W T8 AY36221E - (2) 21W T5 AY36239E-HO* - (2) 39W T5	120E - 120V Electronic 277E - 277V Electronic			
AY48 (48" Fixture)	AY48132E - (1) 32W T8 AY48232E - (2) 32W T8 AY48228E - (2) 28W T5 AY48254E-HO* - (2) 54W T5	120E - 120V Electronic 277E - 277V Electronic			
	HO* - High Output				

REPLACEMENT PARTS PART NO.

24" White Acrylic Diffuser w/ White Marble End Caps	3098754
36" White Acrylic Diffuser w/ White Marble End Caps	3098854
48" White Acrylic Diffuser w/ White Marble End Caps	3098954

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EB:
Bodine's B50LP (T8 Electronic) - Temperature Rating (Ambient) 32° F - 131° F
Bodine's LP550 (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

