

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


AZINGER



LINEAR FLUORESCENT

FEATURES

- Steel Trim w/ Swedish Steel Powder Coat Finish
- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Lamps Not Included (Except For 13W 2-Pin Biax Magnetic)
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- ADA Compliant
- ETL Listed Damp Location

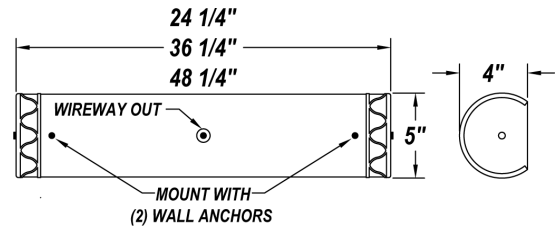

ORDERING INFORMATION

Example : (AR24217E - 120E) Swedish Steel is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
AR24 (24" Fixture)	AR24117E - (1) 17W T8 AR24217E - (2) 17W T8 AR24214E - (2) 14W T5 AR24224E-HO* - (2) 24W T5	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	F - Fused EB - Integral Emergency Battery (3' and 4' Only)** W2L - Wire 2 Lamps to Integral Emergency Battery
AR36 (36" Fixture)	AR36125E - (1) 25W T8 AR36225E - (2) 25W T8 AR36221E - (2) 21W T5 AR36239E-HO* - (2) 39W T5	120E - 120V Electronic 277E - 277V Electronic			
AR48 (48" Fixture)	AR48132E - (1) 32W T8 AR48232E - (2) 32W T8 AR48228E - (2) 28W T5 AR48254E-HO* - (2) 54W T5	120E - 120V Electronic 277E - 277V Electronic			
HO* - HIGH OUTPUT					

REPLACEMENT PARTS PART NO.

24" White Acrylic Diffuser	3018160
36" White Acrylic Diffuser	3018560
48" White Acrylic Diffuser	3012960

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EB:
Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

