

BAYSIDE




LINEAR FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Internal Baffle w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ White Powder Coat Finish
- Clear Ribbed Acrylic Lens
- Up / Down Lighting
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- Lamps Not Included
- Convenience Outlet Available
- Pull Chain Available
- ETL Listed Damp Location

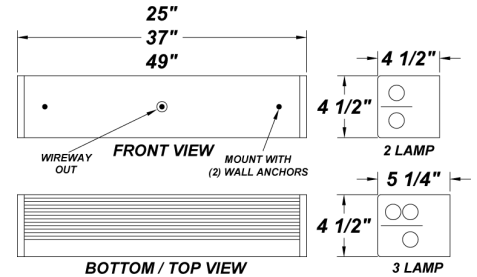

ORDERING INFORMATION

Example : (BYD48332E - 120E - SM)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
BYD24 (24" Fixture)	BYD24217E - (2) 17W T8 BYD24317E - (3) 17W T8 BYD24214E - (2) 14W T5 BYD24314E - (3) 14W T5	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	WH - Gloss White (Standard) TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory CH - Chrome Plated	CO - Convenience Outlet F - Fused MSW - Multi-Lamp Switch w/ Pull Chain (For 3-Lamp Fixtures) 2SW - 2-Lamp Switch w/ Pull Chain NLT - Night Light EB - Integral Emergency Battery (3' and 4' Only)** BFL - Front Baffle For Up / Down Lighting
BYD36 (36" Fixture)	BYD36225E - (2) 25W T8 BYD36325E - (3) 25W T8 BYD36221E - (2) 21W T5 BYD36321E - (3) 21W T5				
BYD48 (48" Fixture)	BYD48232E - (2) 32W T8 BYD48332E - (3) 32W T8 BYD48228E - (2) 28W T5 BYD48328E - (3) 28W T5				

REPLACEMENT PARTS

PART NO.

24" Clear Acrylic (2 Lamp) Diffuser	30909
24" Clear Acrylic (3 Lamp) Diffuser	30047
36" Clear Acrylic (2 Lamp) Diffuser	30907
36" Clear Acrylic (3 Lamp) Diffuser	30048
48" Clear Acrylic (2 Lamp) Diffuser	30904
48" Clear Acrylic (3 Lamp) Diffuser	30049

ARRA 2009



BUY AMERICA ACT



NOTES

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EB:

Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.