

ARCHITECTURAL OUTDOOR

BRIDGESTONE HID




Shown with White Alabaster Acrylic

COMPACT FLUORESCENT & HID

| |
|--------------|
| PROJECT : |
| TYPE : |
| ORDERING # : |
| COMMENTS : |

FEATURES

- Steel Housing w/ Textured Black Polyester Powder Coat Finish
- Extruded Aluminum Mount Pan w/ Hi Reflectance White Powder Coat Finish
- Solid Top & Bottom
- Luminous White Polycarbonate Panels
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (1x32W Max)
- ETL Listed Wet Location

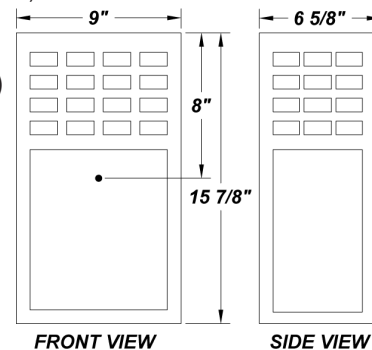

ORDERING INFORMATION

Example : (BGH232X - 120E - WBL - 35K)

Textured Black is Standard Finish

| PRODUCT | SOURCE/WATTAGE | VOLTAGE | DIFFUSER | FINISH | OPTIONS |
|-----------------|--|--|--|---|---|
| Bridgestone HID | BGH50MH - (1) 50W MH BGH70MH - (1) 70W MH BGH100MH - (1) 100W MH | METAL HALIDE (MH) 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) | WPL - White Polycarbonate (Standard) | SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White | 41K - 4100K Color Temp. (Standard) 35K - 3500K Color Temp. 27K - 2700K Color Temp. F - Fused PCL - Photocell DIM - Dimming Ballast (Electronic Only) TP - Tamper Resistant Screws QRS - Quartz Restrike (DC/Bay - Lamp Included) QRZ - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (1x32W Maximum) EBR - Remote Mount Battery (Field Installed)** |
| | BGH50 - (1) 50W HPS BGH70 - (1) 70W HPS BGH100 - (1) 100W HPS | HPS 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) | WAL - White Acrylic WBL - White Alabaster Acrylic | The Following Are To Be Used With Fluorescent Wattages ONLY | |
| | BGH132X - (1) 32W TBX BGH142X - (1) 42W TBX BGH157X - (1) 57W TBX BGH232X - (2) 32W TBX | FLUORESCENT (F) 120E - 120V Electronic 277E - 277V Electronic | (MT - Multi-Tap) | RAL Colors or Custom Match - Consult Factory | |

REPLACEMENT PARTS

PART NO.

| | |
|--|---------|
| White Polycarbonate Lens Panel Set | 9800860 |
| White Acrylic Lens Panel Set | 9800960 |
| White Alabaster Acrylic Lens Panel Set | 9800959 |

NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC:

Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

