

**CADDY LG**




COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Tempered Clear Glass Diffuser
- Aluminum Hammertone Reflectors
- Fully Gasketed
- Mounts Direct to Flat Surface w/Three #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available
- ETL Listed Wet Location

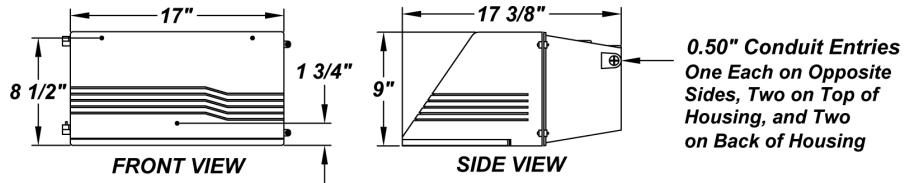

**ORDERING INFORMATION**

Example : (CDL226X - 120E - 27K)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Caddy LG	CDL250MH - 250W MH CDL400MH - 400W MH	<b>METAL HALIDE (MH)</b> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 27K - 2700K Color Temp.* (Standard) PCL - Photocell F - Fused QRS - Quartz Restrike (DC/Bay - Lamp Included) QRZ - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (2x42W Maximum) EBR - Remote Mount Battery (Field Installed)** W2L - Wire 2 Lamps to Integral Emergency Battery (2x26W Maximum) PST - Pulse Start Ballast (Metal Halide Only)
	CDL250 - 250W HPS CDL400 - 400W HPS	<b>HPS</b> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)			
	CDL132X - (1) 32W TBX CDL142X - (1) 42W TBX CDL157X - (1) 57W TBX CDL170X - (1) 70W TBX CDL226X - (2) 26W TBX CDL232X - (2) 32W TBX CDL242X - (2) 42W TBX	(MT - Multi-Tap) <b>FLUORESCENT (F)</b> 120E - Electronic 120V 277E - Electronic 277V			
				<b>RAL Colors or Custom Match - Consult Factory</b>	

**REPLACEMENT PARTS**

**PART NO.**

Clear Glass Diffuser

37050

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Fluorescent Only**

**\*\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:**

Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

**EBC:**

Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

**EBR:**

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

**ARRA 2009**



**BUY AMERICA ACT**