


PROJECT :
TYPE :
ORDERING # :
COMMENTS :

CORNERSTONE W LED



FEATURES

- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Tempered Glass Diffusers
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- One 20W Driver Per Four 4.2W LED Modules
- Surge Protector
- Integral Emergency LED Driver Available
- CSA Listed Wet Location

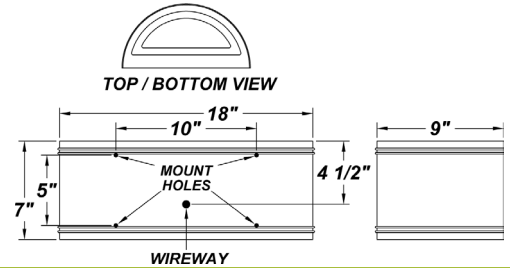

ORDERING INFORMATION

Example : (CRNW - L216.8 - 51K - TB)

Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS / SPECS
CRNW					
Cornerstone W	L116.8 - (4) 4.2W LED Modules - (One Side Illuminated) - (Downlight Only) - (1) 20 Watt Driver L216.8 - (8) 4.2W LED Modules - (Four LED Modules Per Side) - (1) 40 Watt Driver L133.6 - (8) 4.2W LED Modules - (One Side Illuminated) - (Downlight Only) - (1) 40 Watt Driver L233.6 - (16) 4.2W LED Modules - (Eight LED Modules Per Side) - (2) 40 Watt Drivers 4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70) Please See the "Options / Specs" Column For Lumen Specifications	100V - 277V Please See "Options / Specs" Column For Voltage Specifications	Not Applicable	TB - Textured Black SM - Matte Silver AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	L116.8 - Four 4.2W LED Modules 30K - 3000K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW30Bin, Color Temp = 3000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 940 TOTAL Lumens - 23W Input = Estimated 41 Lumens Per Watt L116.8 - Four 4.2W LED Modules 51K - 5100K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW51Bin, Color Temp = 5100K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 960 TOTAL Lumens - 23W Input = Estimated 42 Lumens Per Watt L216.8 & L133.6 - Eight 4.2W LED Modules 30K - 3000K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW30Bin, Color Temp = 3000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 1880 TOTAL Lumens - 45.2W Input = Estimated 41.5 Lumens Per Watt L216.8 & L133.6 - Eight 4.2W LED Modules 51K - 5100K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW51Bin, Color Temp = 5100K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 1985 TOTAL Lumens - 45.2W Input = Estimated 44 Lumens Per Watt

REPLACEMENT PARTS

PART NO.

Replacement Clear Glass Lens	37028
Replacement Black Glass Lens	3702824

ARRA 2009



We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

The L216.8 Wattage Was Tested in Accordance With IES Standards Utilizing Absolute Photometry Per LM-79-08 at the Standard UL Temperature of 25°C (77°F)

**Definition of 40,000 hours: Lifetime Rating is Based on Lamp Manufacturers' LM80 Test Results Which Utilized an Exponentially Decaying Model, a Standard Used by The Department of Energy, as Well as by Other Manufacturers.


CORNERSTONE W LED



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Tempered Glass Diffusers
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- One 20W Driver Per Four 4.2W LED Modules
- Surge Protector
- Integral Emergency LED Driver Available
- CSA Listed Wet Location

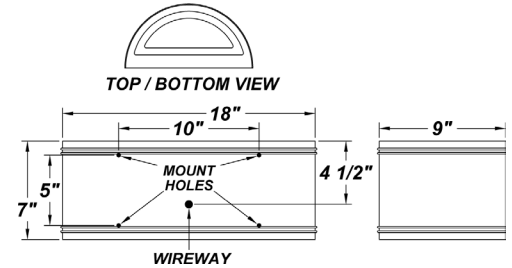

ORDERING INFORMATION

Example : (CRNW - L216.8 - 51K - TB)

Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS / SPECS
CRNW					
Cornerstone W	L116.8 - (4) 4.2W LED Modules - (One Side Illuminated) - (Downlight Only) - (1) 20 Watt Driver L216.8 - (8) 4.2W LED Modules - (Four LED Modules Per Side) - (1) 40 Watt Driver L133.6 - (8) 4.2W LED Modules - (One Side Illuminated) - (Downlight Only) - (1) 40 Watt Driver L233.6 - (16) 4.2W LED Modules - (Eight LED Modules Per Side) - (2) 40 Watt Drivers 4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70) Please See the "Options / Specs" Column For Lumen Specifications	100V - 277V Please See "Options" Column For Specifications	Not Applicable	TB - Textured Black SM - Matte Silver AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	L233.6 - Sixteen 4.2W LED Modules 30K - 3000K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Strip - SW30Bin, Color Temp = 3000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 3760 TOTAL Lumens - 80W Input = Estimated 47 Lumens Per Watt L233.6 - Sixteen 4.2W LED Modules 51K - 5100K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Strip - SW51Bin, Color Temp = 5100K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 4480 TOTAL Lumens - 80W Input = Estimated 56 Lumens Per Watt EB - Bodine BSL26 - Will light 4 LED Modules - on Down Side of Fixture - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens Please Note: 120V or 277V Must Be Specified When Ordering The EB Option

REPLACEMENT PARTS

PART NO.

Replacement Clear Glass Lens	37028
Replacement Black Glass Lens	3702824

NOTES

The L216.8 Wattage Was Tested in Accordance With IES Standards Utilizing Absolute Photometry Per LM-79-08 at the Standard UL Temperature of 25° C (77° F)

Emergency Driver Options: Voltage Specific at 120V or 277V

Initial light output in Emergency mode will last for a minimum of 90 minutes. 4 LED Strips on down side of fixture will be lit. Please refer to Bodine's specification sheet for more details.
EBSL26: Bodine's BSL26 (LED) - Temperature Rating (Ambient) 32° F - 122° F

**Definition of 40,000 hours: Lifetime Rating is Based on Lamp Manufacturers' LM80 Test Results Which Utilized an Exponentially Decaying Model, a Standard Used by The Department of Energy, as Well as by Other Manufacturers.

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

