

CREST HILLS




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Housing w/ Gloss White Powder Coat Finish
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Mount For Uplight Use Only
- ETL Listed Dry Location

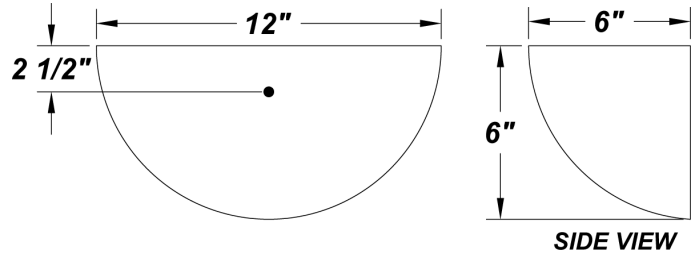

ORDERING INFORMATION

Example : (CH213Q - 120E - BZ - 27K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Crest Hills	CH113Q - (1) 13W QE CH213Q - (2) 13W QE CH118Q - (1) 18W QE CH218Q - (2) 18W QE CH126Q - (1) 26W QE CH226Q - (2) 26W QE CH132X - (1) 32W TBX CH142X - (1) 42W TBX	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	WH - Gloss White (Standard) SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. 35K - 3500K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused DIM - Dimming Ballast (Electronic Only) EBR - Remote Mount Battery (Field Installed)* PFS - Perforated Screen Cover

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

***Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT