

DESERT CLASSIC




LINEAR FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser w/ Black Marble Acrylic End Caps
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- Lamps Not Included
- ADA Compliant
- ETL Listed Damp Location

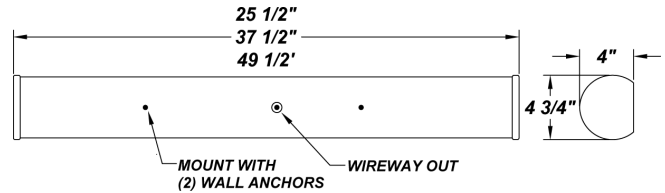

ORDERING INFORMATION

Example : (DC24217E - 120E)

Black Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
DC24 (25 1/2" Fixture)	DC24117E - (1) 17W T8 DC24217E - (2) 17W T8 DC24214E - (2) 14W T5 DC24224E-HO* - (2) 24W T5	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	Optional End Cap Colors Available - Consult Factory For Details and Pricing	F - Fused EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only) W2L - Wire 2 Lamps to Integral Emergency Battery
DC36 (37 1/2" Fixture)	DC36125E - (1) 25W T8 DC36225E - (2) 25W T8 DC36221E - (2) 21W T5 DC36239E-HO* - (2) 39W T5	120E - 120V Electronic 277E - 277V Electronic			
DC48 (49 1/2" Fixture)	DC48132E - (1) 32W T8 DC48232E - (2) 32W T8 DC48228E - (2) 28W T5 DC48254E-HO* - (2) 54W T5	120E - 120V Electronic 277E - 277V Electronic			
HO* - HIGH OUTPUT					

REPLACEMENT PARTS

PART NO.

24" White Acrylic Diffuser w/ Black Marble End Caps	3007451
36" White Acrylic Diffuser w/ Black Marble End Caps	3007551
48" White Acrylic Diffuser w/ Black Marble End Caps	3007651

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

**Emergency Battery Options

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EB:

Bodine's B50 (T8 Electronic) - Temperature Rating (Ambient) 32° F - 131° F
Bodine's LP550 (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009

