

DUNES




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (14" Fixture & Damp Location Only)
- ETL Listed Dunes Location

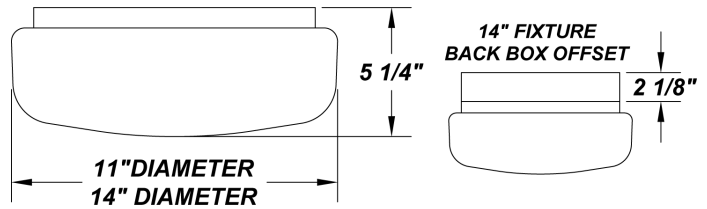

ORDERING INFORMATION

Example : (DS213Q - 120E - CP - 41K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Dunes 11" Fixture	DS113 - (1) 13W PL 2-Pin Biax Magnetic (120V Only) DS213 - (2) 13W PL 2-Pin Biax Magnetic (120V Only) DS113Q - (1) 13W QE DS213Q - (2) 13W QE DS118Q - (1) 18W QE DS126Q - (1) 26W QE	120E - Electronic 120V 277E - Electronic 277V	Not Applicable	WH - Gloss White (Standard) SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. 35K - 3500K Color Temp. (Except for 32W & 54W Circ) 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard)(Exceptions Same as 35K) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws DIM - Dimming Ballast * (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)* EBW/BB - Integral Emergency Battery** (14" Fixture only) (Back Box Required) BB - Back Box for 14" Fixture W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) ALP - Aluminum Mount Pan
Dunes 14" Fixture	DS122CE - (1) 22W T5 Circ DS313 - (3) 13W PL 2-Pin Biax Magnetic (120V Only) DS218Q - (2) 18W QE DS226Q - (2) 26W QE	120E - Electronic 120V 277E - Electronic 277V			

REPLACEMENT PARTS

PART NO.

11" White Acrylic Diffuser	3010060
14" White Acrylic Diffuser	3010160

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT

NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F