


FAULTLESS

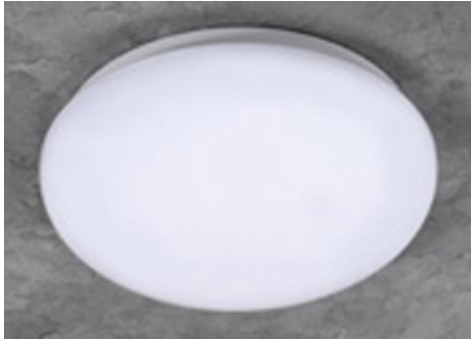


COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (14" & 19" Fixtures Only) (Damp Location Only)
- ADA Compliant
- ETL Listed Damp Location

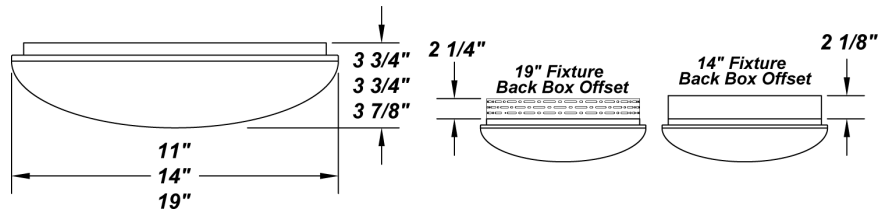

ORDERING INFORMATION

Example : (FS218Q - 120E - TB - 41K) White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Faultless 11" Fixture	FS113 - (1) 13W PL 2-Pin Biax Magnetic (120V Only) FS213 - (2) 13W PL 2-Pin Biax Magnetic (120V Only) FS113Q - (1) 13W QE FS213Q - (2) 13W QE FS118Q - (1) 18W QE FS126Q - (1) 26W QE	120N - 120V NPF Magnetic 120E - Electronic 120V 277E - Electronic 277V NOTE: 277V Magnetic NOT Available	WAL - White Acrylic (Standard) WPL - White Polycarbonate (Available in 14" Only)	WH - Gloss White (Standard) SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. (Standard for 22W & 40W T5 Circ) 27K - 2700K Color Temp. (Standard) (Not Available for 22W & 40W T5 Circ) F - Fused TP - Tamper Resistant Screws DIM - Dimming Ballast * (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)** EBW/BB - Integral Emergency Battery** (Back Box Required) BB - Back Box for 14" or 19" Fixture W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) ALP - Aluminum Mount Pan
Faultless 14" Fixture	FS122CE - (1) 22W T5 Circ FS313 - (3) 13W PL 2-Pin Biax Magnetic (120V Only) FS218Q - (2) 18W QE FS226Q - (2) 26W QE	120N - 120V NPF Magnetic 120E - Electronic 120V 277E - Electronic 277V NOTE: 277V Magnetic NOT Available			
Faultless 19" Fixture	FS140CE - (1) 40W T5 Circ FS413Q - (4) 13W QE FS326Q - (3) 26W QE FS162CE - (1) 22/40W T5 Circ	120E - Electronic 120V 277E - Electronic 277V			

REPLACEMENT PARTS	PART NO.
11" White Acrylic Diffuser	3021160
14" White Acrylic Diffuser	3021460
19" White Acrylic Diffuser	3019960
14" White Polycarbonate Diffuser	3424860

NOTES
<p>*Fluorescent Only</p> <p>**Emergency Battery Options Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet</p> <p>EBW: Bodine's B213 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F</p> <p>EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F</p>



We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.