


PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**GENTRY S**

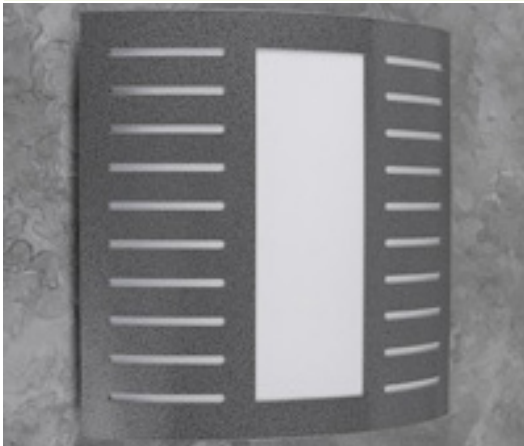

COMPACT FLUORESCENT

**FEATURES**

- Steel Fascia w/ Swedish Steel Powder Coat Finish
- Luminous White Acrylic Diffuser
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Perforated Top & Bottom Covers
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available
- ADA Compliant
- ETL Listed Dry Location

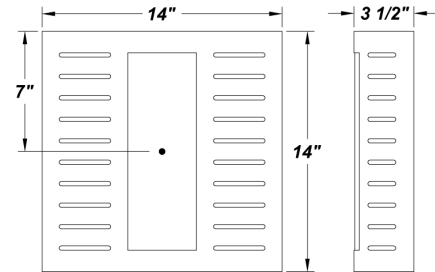

**ORDERING INFORMATION**

Example : (GNTS - F226Q - 120E - WAL - SW - 41K) Swedish Steel is Standard Finish

GNTS					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
<b>Gentry S</b>	F213E - (2) 13W 4-Pin Biax F218Q - (2) 18W QE F226Q - (2) 26W QE	120E - 120V Electronic 277E - 277V Electronic	WAL - White Acrylic	<b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>KC</b> - Kenworth Chrome <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>41K</b> - 4100K Color Temp. (Standard) <b>35K</b> - 3500K Color Temp. (Except F213E) <b>27K</b> - 2700K Color Temp. <b>F</b> - Fused <b>DIM</b> - Dimming Ballast (QE Electronic Only) <b>EBW</b> - Integral Emergency Battery * <b>EBR</b> - Remote Mount Battery (Field Installed)* <b>W2L</b> - Wire 2 Lamps to Integral Emergency Battery (2x18W Max)

**REPLACEMENT PARTS** PART NO.

White Acrylic Lens	3027260
--------------------	---------

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Emergency Battery Options**  
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:**  
Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

**EBR:**  
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

