

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**JANZEN**



LINEAR FLUORESCENT

**FEATURES**

- Steel Housing & Reflector w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ Swedish Steel Polyester Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Lamps Not Included
- ADA Compliant
- ETL Listed Damp Location

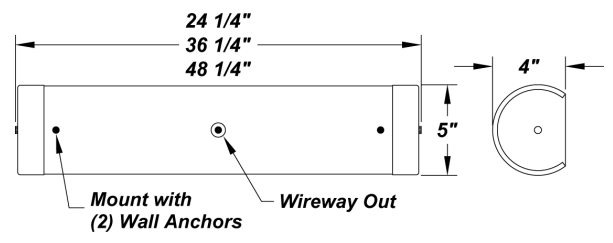

**ORDERING INFORMATION**

Example : (JN24217E - 120E) Swedish Steel is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
JN24 (24" Fixture)	JN24117E - (1) 17W T8 JN24217E - (2) 17W T8 JN24214E - (2) 14W T5 JN24224E-HO* - (2) 24W T5	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  RAL Colors or Custom Match - Consult Factory	F - Fused EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only) W2L - Wire 2 Lamps to Integral Emergency Battery
JN36 (36" Fixture)	JN36125E - (1) 25W T8 JN36225E - (2) 25W T8 JN36221E - (2) 21W T5 JN36239E-HO* - (2) 39W T5	120E - 120V Electronic 277E - 277V Electronic			
JN48 (48" Fixture)	JN48132E - (1) 32W T8 JN48232E - (2) 32W T8 JN48228E - (2) 28W T5 JN48254E-HO* - (2) 54W T5  HO* - HIGH OUTPUT	120E - 120V Electronic 277E - 277V Electronic			

**REPLACEMENT PARTS**

	PART NO.
24" White Acrylic Diffuser	3018160
36" White Acrylic Diffuser	3018560
48" White Acrylic Diffuser	3012960

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*\*Emergency Battery Options**  
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet  
**EB:**  
Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F  
Bodine's B550LP (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

