

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


KARSTEN CREEK



COMPACT & LINEAR FLUORESCENT

FEATURES

- Aluminum Housing & End Caps w/ Polished Brass Plated Finish
- Steel Mounting Pan
- Clear Ribbed Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Lamps Not Included
- ETL Listed Damp Locations

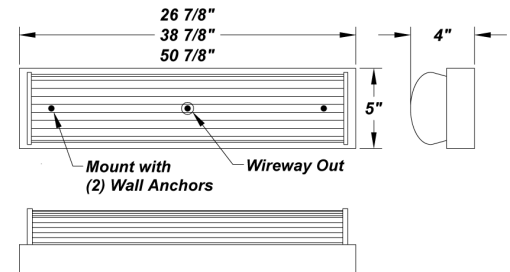

ORDERING INFORMATION

Example : (KK24217E - 120E - CH) Polished Brass is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
KK24 (24" Fixture)	KK24117E - (1) 17W T8 KK24217E - (2) 17W T8	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	PB - Polished Brass Plate CH - Chrome Plate SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	EB - Integral Emergency Battery (3' and 4' Only)** TP - Tamper Resistant 2SW - 2-Lamp Switch w/ Pull Chain MSW - Multi-Lamp Switch w/ Pull Chain F - Fused W2L - Wire 2 Lamps to Integral Emergency Battery
KK36 (36" Fixture)	KK36125E - (1) 25W T8 KK36225E - (2) 25W T8				
KK48 (48" Fixture)	KK48132E - (1) 32W T8 KK48232E - (2) 32W T8				

REPLACEMENT PARTS PART NO.

24" Clear Acrylic Diffuser	30020
36" Clear Acrylic Diffuser	30021
48" Clear Acrylic Diffuser	30022

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EB:
Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

