

MIZUNO




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Frame & Trim w/ Textured Black Polyester Powder Coat Finish
- Matte White Polycarbonate Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- ETL Listed Wet Location

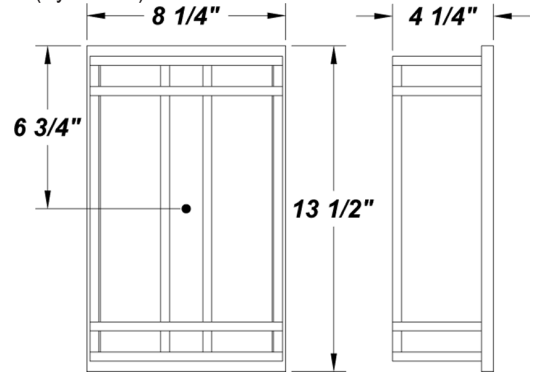

ORDERING INFORMATION

Example : (MZ226X - 120E - 35K)

Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Mizuno	MZ213Q - (2) 13W QE MZ218X - (2) 18W TBX MZ226X - (2) 26W TBX	120E - Electronic 120V 277E - Electronic 277V	WPL - White Polycarbonate Lens (Standard) WAL - White Acrylic Lens	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White PB - Polished Brass Plated RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. (Standard) 35K - 3500K Color Temp. 27K - 2700K Color Temp. TP - Tamper Resistant Screws EBR - Remote Mount Battery (Field Installed)*

REPLACEMENT PARTS

PART NO.

White Polycarbonate Lens	3413460
White Acrylic Lens	3013460

NOTES

****Emergency Battery Options (Back Box Required)**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT

