


PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**MUIRFIELD**

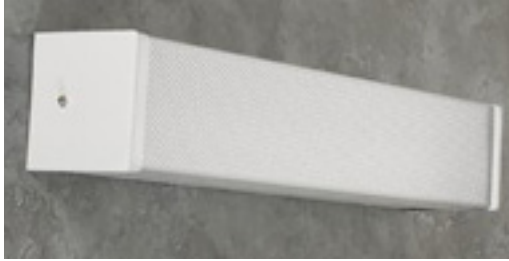

COMPACT & LINEAR FLUORESCENT

**FEATURES**

- Steel Housing w/ White Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ White Powder Coat Finish
- Clear Acrylic Lens w/ Ribbed Sides and Prismatic Front
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- Lamps Not Included
- Convenience Outlet & Pull Chain Available
- ETL Listed Damp Location
- Wattages With a (ES) Are Available @ 120V With Energy Star Compliant Lamps and Ballasts

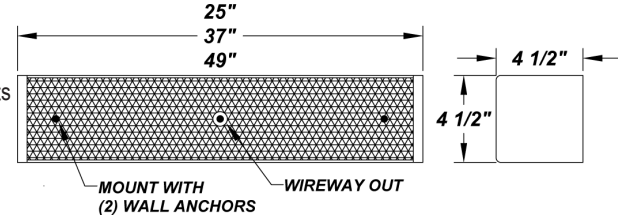

**ORDERING INFORMATION**

Example : (MD48232E - 120E - SM)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
MD24 (24" Fixture)	MD24117E - (1) 17W T8 MD24217E - (2) 17W T8 (ES)* MD24155FTE - (1) 55W FT	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	WH - Gloss White (Standard) CH - Chrome Plated SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  RAL Colors or Custom Match - Consult Factory	MS - Motion Sensor - Wattstopper FS-505 (See Muirfield Sensor Cutsheet for Specs) CO - Convenience Outlet F - Fused MSW - Multi-Lamp Switch w/ Pull Chain (For 3-Lamp Fixtures) 2SW - Multi-Lamp Switch w/ Pull Chain EB - Integral Emergency Battery (3' and 4' Only)** W2L - Wire 2 Lamps to Integral Emergency Battery ES - Energy Star Listed Fixture w/ Compliant Ballasts & Lamps
MD36 (36" Fixture)	MD36125E - (1) 25W T8 MD36225E - (2) 25W T8 MD36221E - (2) 21W T5	120E - 120V Electronic 277E - 277V Electronic			
MD48 (48" Fixture)	MD48132E - (1) 32W T8 MD48232E - (2) 32W T8 (ES)* MD48228E - (2) 28W T5  *Aluminum Housing Required	120E - 120V Electronic 277E - 277V Electronic			

**REPLACEMENT PARTS**

**PART NO.**

24" Clear Acrylic Diffuser	30909
24" White Acrylic Diffuser	3090960
36" Clear Acrylic Diffuser	30907
36" White Acrylic Diffuser	3090760
48" Clear Acrylic Diffuser	30904
48" White Acrylic Diffuser	3090460

**NOTES**

**\*\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:**

Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

**ARRA 2009**



**BUY AMERICA ACT**



We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.