


PROJECT :
TYPE :
ORDERING # :
COMMENTS :


NICKLAUS

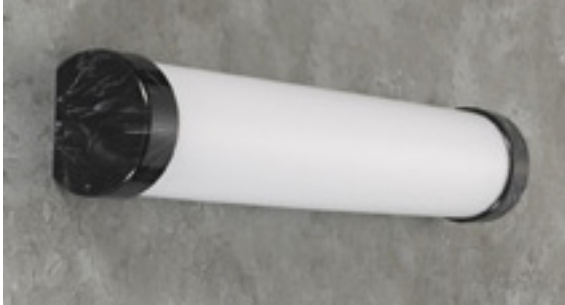

LINEAR FLUORESCENT

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser w/ Black Marble Acrylic End Caps
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- Lamps Not Included
- ADA Compliant
- ETL Listed Damp Location

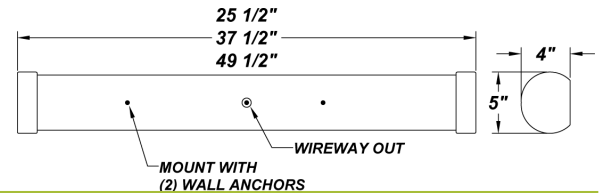

ORDERING INFORMATION

Example : (NS36225E - 120E) Black Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
NS24 (25 1/2" Fixture)	NS24117E - (1) 17W T8	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	Optional End Cap Colors Available - Consult Factory For Details and Pricing	F - Fused EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only)
	NS24217E - (2) 17W T8				
	NS24214E - (2) 14W T5				
	NS24224E-HO* - (2) 24W T5				
NS36 (37 1/2" Fixture)	NS36125E - (1) 25W T8	120E - 120V Electronic 277E - 277V Electronic			
	NS36225E - (2) 25W T8				
	NS36221E - (2) 21W T5				
	NS36239E-HO* - (2) 39W T5				
NS48 (49 1/2" Fixture)	NS48132E - (1) 32W T8	120E - 120V Electronic 277E - 277V Electronic			
	NS48232E - (2) 32W T8				
	NS48228E - (2) 28W T5				
	NS48254E-HO* - (2) 54W T5				
HO* - HIGH OUTPUT					

REPLACEMENT PARTS PART NO.

24" White Acrylic Diffuser w/ Black Marble End Caps	3017051
36" White Acrylic Diffuser w/ Black Marble End Caps	3017251
48" White Acrylic Diffuser w/ Black Marble End Caps	3017151

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***2-Pin Biax Magnetic Only**
****Emergency Battery Options**
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBW:
 Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
 Bodine's B550LP (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

