

PLAYER II




LINEAR FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Lamps Not Included
- ETL Listed Damp Location

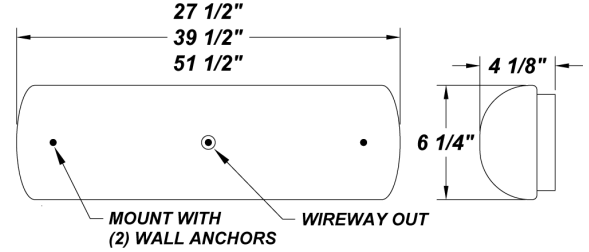

ORDERING INFORMATION

Example : (PY36225E - 120E)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
PY24 (24" Fixture)	PY24117E - (1) 17W T8 PY24217E - (2) 17W T8 PY24214E - (2) 14W T5	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	Not Applicable	F - Fused TP - Tamper Resistant Screws EB - Integral Emergency Battery (3' and 4' Only)**
PY36 (36" Fixture)	PY36125E - (1) 25W T8 PY36225E - (2) 25W T8 PY36221E - (2) 21W T5	120E - 120V Electronic 277E - 277V Electronic			
PY48 (48" Fixture)	PY48132E - (1) 32W T8 PY48232E - (2) 32W T8 PY48228E - (2) 28W T5	120E - 120V Electronic 277E - 277V Electronic			

REPLACEMENT PARTS

PART NO.

24" White Acrylic Diffuser	3044260
36" White Acrylic Diffuser	3044360
48" White Acrylic Diffuser	3044460

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***2-Pin Biax Magnetic Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

ARRA 2009



BUY AMERICA ACT

