

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


PLAYER



COMPACT FLUORESCENT

FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- ETL Listed Damp Location

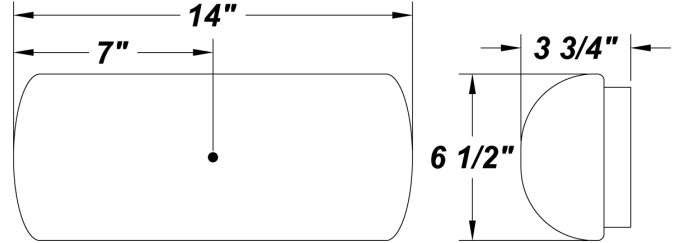

ORDERING INFORMATION

Example : (PY218Q - 120E - 41K) White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Player	PY113Q - (1) 13W QE PY213Q - (2) 13W QE PY118Q - (1) 18W QE PY218Q - (2) 18W QE PY126Q - (1) 26W QE PY226Q - (2) 26W QE PY132X - (1) 32W TBX	120E - Electronic 277E - Electronic	Not Applicable	Not Applicable	41K - 4100K Color Temp. 35K - 3500K Color Temp. 27K - 2700K Color Temp. (Standard) DIM - Dimming Ballast TP - Tamper Resistant Screws EBR - Remote Mount Battery (Field Installed)*

REPLACEMENT PARTS PART NO.

White Acrylic Lens	3044160
--------------------	---------

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBR:
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

