


PROJECT :
TYPE :
ORDERING # :
COMMENTS :


ROMERO

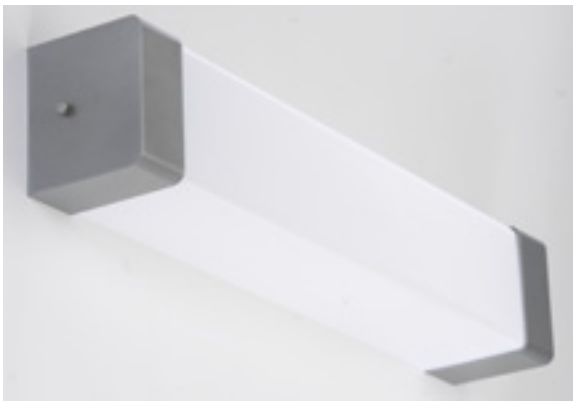

LINEAR FLUORESCENT

FEATURES

- Steel Housing & Reflector w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ Matte Silver Polyester Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Lamps Not Included
- ADA Compliant
- ETL Listed Damp Location

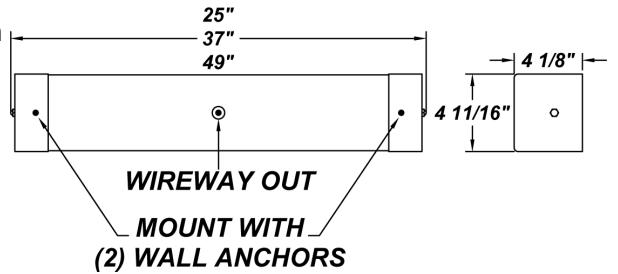

ORDERING INFORMATION

Example : (RM24214E - 120E - SW) Matte Silver is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
RM24 (24" Fixture)	RM24117E - (1) 17W T8 RM24217E - (2) 17W T8 RM24214E - (2) 14W T5	120E - 120V Electronic 277E - 277V Electronic	WAL - White Acrylic (Standard) WBL - White Alabaster Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	F - Fused EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only) W2L - Wire 2 Lamps to Integral Emergency Battery DIM - Dimming Ballast (T8 Lamping Only)
RM36 (36" Fixture)	RM36125E - (1) 25W T8 RM36225E - (2) 25W T8 RM36221E - (2) 21W T5	120E - 120V Electronic 277E - 277V Electronic			
RM48 (48" Fixture)	RM48132E - (1) 32W T8 RM48232E - (2) 32W T8 RM48228E - (2) 28W T5	120E - 120V Electronic 277E - 277V Electronic			

REPLACEMENT PARTS

	PART NO.
24" White Acrylic Diffuser	3029160
24" Alabaster Acrylic Diffuser	3029150
36" White Acrylic Diffuser	3029260
36" Alabaster Acrylic Diffuser	3029250
48" White Acrylic Diffuser	3029360
48" Alabaster Acrylic Diffuser	3029350

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EB:
Bodine's B50 (T8 Electronic) - Temperature Rating (Ambient) 32° F - 131° F
Bodine's LP550 (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT

