

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


TALON W



COMPACT FLUORESCENT & HID

FEATURES

- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Tempered Glass Diffuser
- Aluminum Hammertone Reflectors
- 50% Up / 50% Down Standard Light Distribution
- Dark Sky Compliancy Available - See Options
- Stainless Steel Hex-Head Screws
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available
- ETL Listed Wet Location

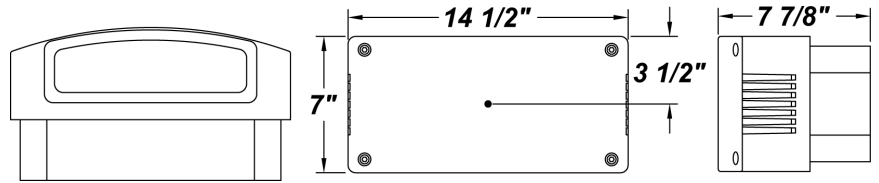

ORDERING INFORMATION

Example : (TLNW - F142X - 120E - TB - 41K) Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Talon W	M50 - 50W MH M70 - 70W MH M100 - 100W MH S50 - 50W HPS S70 - 70W HPS S100 - 100W HPS S150 - 150W HPS F126Q - (1) 26W QE F226Q - (2) 26W QE F132X - (1) 32W TBX F232X - (2) 32W TBX F142X - (1) 42W TBX F157X - (1) 57W TBX F170X - (1) 70W TBX	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF(Wired 120V) MTH - MT HPF (Wired 277V) <u>HPS</u> 120V - 120V HPF 120H - MT HPF(Wired 120V) MTH - MT HPF(Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - Electronic 120V 277E - Electronic 277V	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* (Standard) 35K - 3500K Color Temp.* 27K - 2700K Color Temp.* DIM - Dimming Ballast (QE Only) DL - Downlight Only UL - Uplight Only UL10 - 10% Uplight QRS - Quartz Restrike (DC/Bay - Lamp Included) QRZ - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (42W Maximum) EBR - Remote Mount Battery (Field Installed) ** PCL120 - Photocell 120V PCL277 - Photocell 277V W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum)

REPLACEMENT PARTS

REPLACEMENT PARTS	PART NO.
Replacement Clear Glass Lens	37966

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Fluorescent Only**
****Emergency Battery Options**
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBW:
 Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
EBC:
 Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F
EBR:
 Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

