

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**TRITON**



COMPACT FLUORESCENT & HID

**FEATURES**

- Steel Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Tempered Glass Diffuser
- Anod Aluminum Reflector
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available
- ETL Listed Wet Location
- Dark Sky Compliant

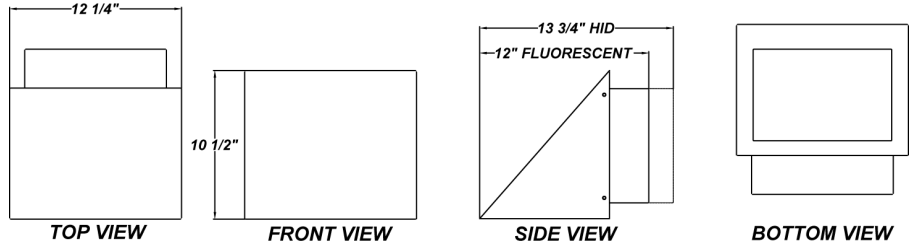

**ORDERING INFORMATION**

Example : (TTN142X - 120E - SM - 35K) Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Triton	TTN50MH - 50W MH TTN70MH - 70W MH TTN100MH - 100W MH  TTN50 - 50W HPS TTN70 - 70W HPS TTN100 - 100W HPS  TTN226Q - (2) 26W QE TTN132X - (1) 32W TBX TTN142X - (1) 42W TBX	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF(Wired 120V) MTH - MT HPF (Wired 277V)  <u>HPS</u> 120V - 120V HPF 120H - MT HPF(Wired 120V) MTH - MT HPF(Wired 277V)  (MT - Multi-Tap)  <b>PLEASE NOTE: HID Wattages Will Add 1 3/4" to the Fixture Depth</b>  <u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast * (Electronic Only) EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed)** PST - Pulse Start Lamp & Ballast LXS - Polycarbonate Lexan Shield W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum)

**REPLACEMENT PARTS PART NO.**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Fluorescent Only**  
**\*\*Emergency Battery Options**  
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:**  
 Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

**EBC:**  
 Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

**EBR:**  
 Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

