

# ALPINE P SMALL LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Adjustable Wire Cable
- Ceiling Mounted
- Dimmable @ 120V
- ETL/cETL Listed for Dry Locations
- LED Light Fixture
- Steel Composition
- 5.4 lbs.
- 90 CRI



## LINE DRAWING

LINE DRAWING NOT TO SCALE

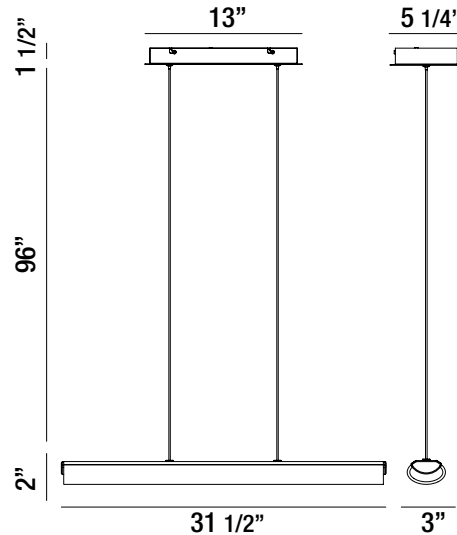

## FINISHES

Chrome



For RAL Colors  
& Custom  
Match -  
Contact Teron  
Lighting Inc.

# ALPINE P SMALL LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ALPPSM - Alpine P Small	L24.0-LT600 - 24.0W @ 600mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120V	TRIAC Dimming @ 120V
ORDER INFO			
ALPPSM Example ^	L24.0-LT600	120V	TRIAC

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	CM - Chrome	30K - 3000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable Example ^	CM	30K	Not Applicable

PROD	SOURCE	30K SPECS				
ALPPSM	L24.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1200 LED Source Lumens</li> <li>50.0 LED Source Lumens Per Watt</li> <li>1174 LED Delivered Lumens</li> <li>48.9 LED Delivered Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.