

METROPOLIS LED

Architectural Indoor



PROJECT:

TYPE:

PO#:

QTY:


COMMENTS:

FEATURES

- Adjustable Wire Cable
- Aluminum Composition
- Ceiling Mounted
- Dimmable @ 120V
- ETL/cETL Listed for Dry Locations
- LED Light Fixture
- T24 Listed
- 3.3 lbs.
- 90 CRI

LINE DRAWING


LINE DRAWING NOT TO SCALE

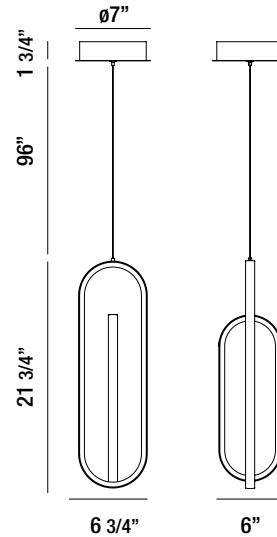

FINISHES

Black

Gold



For RAL Colors
& Custom
Match -
**Contact Teron
Lighting Inc.**

METROPOLIS LED

Architectural Indoor



Fixture Core

PROJECT:

TYPE:

PO#:

QTY:

COMMENTS:

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
MTR - Metropolis LED	L40.0-LT1700 - 40.0W @ 1700mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120V	TRIAC Dimming @ 120V
ORDER INFO			
MTR	L40.0-LT1700	120V	TRIAC

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BLK - Black GLD - Gold	30K - 3000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	BLK	30K	Not Applicable

PROD	SOURCE	30K SPECS				
MTR	L40.0	<ul style="list-style-type: none">30K - 3000K Color Temp1400 LED Source Lumens35.0 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.