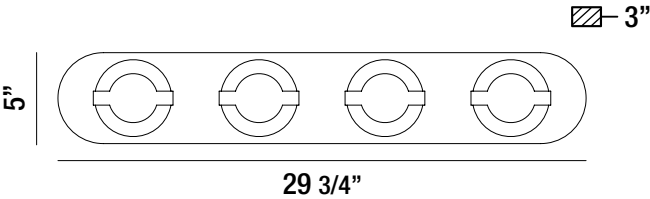# NEKICH MEDIUM LED

Architectural Indoor

FEATURES

- ADA Compliant
- Dimmable @ 120V
- ETL/cETL Listed for Damp Locations
- LED Light Fixture
- Steel Composition
- Wall Mounted
- 5 lbs.
- 90 CRI

LINE DRAWING

LINE DRAWING NOT TO SCALE

⬚– 3"

5"

29 3/4"

FINISHES

Chrome

For RAL Colors
& Custom
Match -
**Contact Teron
Lighting Inc.**

TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004   **F:** 513.858.6038
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to
parts availability or change in UL standards, without assuming any obligation or
liability to modify any products previously manufactured, and without notice.   1

TLI
TERON LIGHTING

NEKICH MEDIUM LED

Architectural Indoor

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NKMD - Nekich Medium LED	**L22.0-LT700** - 22.0W @ 700mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	**120V**	**TRIAC Dimming @ 120V**

ORDER INFO

NKMD	L22.0-LT700	120V	TRIAC

Example ^

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	**CM** - Chrome	**30K** - 3000 Color Temp	**Not Applicable**

ORDER INFO

Not Applicable	CM	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS				
NKMD	L22.0	• 30K - 3000K Color Temp • 2240 LED Source Lumens • 101.8 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES

Don't see the configuration you are looking for?
Call us today at (513) 858-6004

TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004   **F:** 513.858.6038
E: SALES@TERONLIGHT.COM