

SILHOUETTE RD MD LED

Architectural Indoor



PROJECT:

TYPE:

PO#:

QTY:


COMMENTS:

FEATURES

- CSA Listed Dry Location For Ceiling Mount Only
- Emergency Battery Available
- LED Light Fixture
- Luminous White Acrylic Diffuser W/ Decorative Fabric Trim (Gold Vein, Mocha, Natural Linen, and White Linen)
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- [Stem and Canopy Kits Available](#)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Brushed Nickel Vinyl Has a Luminous White Acrylic Diffuser w/ Solid Vinyl Material Providing Down Light Only

LINE DRAWING

LINE DRAWING NOT TO SCALE

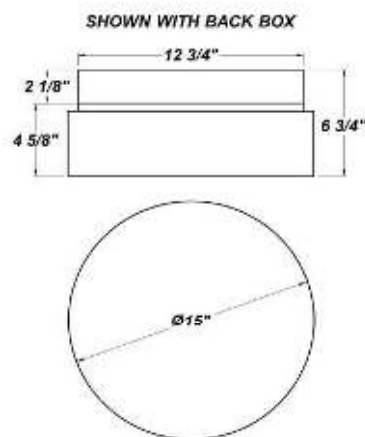

FINISHES

Brushed
Nickel Vinyl



Gold Vein



Mocha



Natural Linen



White Linen



For RAL Colors
& Custom
Match -
**Contact Teron
Lighting Inc.**



TERONLIGHTING.COM

33 DONALD DR, FAIRFIELD, OH 45014

P: 513.858.6004 F: 513.858.6038

E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SEND CUT-SHEET

SILHOUETTE RD MD LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
SHRM15 - Silhouette RD MD	Not Applicable	L17.0 - 17W L20.5 - 20.5W	ZE - 0-10V Dimming
ORDER INFO			
SHRM15 Example ^	L17.0-ZE530	120V	Not Applicable

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV (50 / 60Hz)	GVN - Gold Vein MOC - Mocha NLN - Natural Linen BNV - Brushed Nickel Vinyl WLN - White Linen	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set
ORDER INFO			
Not Applicable Example ^	GVN	30K	BB

PROD	SOURCE	30K SPECS	30K SPECS	30K SPECS		
SHRM15	L17.0	<ul style="list-style-type: none">• TNV / NLN / GVN• 80 CRI Typ.• 30K - 3000K Color Temp• 2650 LED Source Lumens• 157 LED Source Lumens Per Watt	<ul style="list-style-type: none">• MOC Fabric• 80 CRI Typ.• 30K - 3000K Color Temp• 2650 LED Source Lumens• 157 LED Source Lumens Per Watt• 1207 Delivered LED Lumens• 64.7 Delivered LED Lumens Per Watt	<ul style="list-style-type: none">• WMS Fabric• 80 CRI Typ.• 30K - 3000K Color Temp• 2650 LED Source Lumens• 157 LED Source Lumens Per Watt• 1939 Delivered LED Lumens• 103.9 Delivered LED Lumens Per Watt		
	L20.5	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 3100 LED Source Lumens• 151 LED Source Lumens Per Watt	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 3100 LED Source Lumens• 151 LED Source Lumens Per Watt• 1450 Delivered LED Lumens• 60.1 Delivered LED Lumens Per Watt	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 3100 LED Source Lumens• 151 LED Source Lumens Per Watt• 2331 Delivered LED Lumens• 96.7 Delivered LED Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
15" Brushed Nickel Vinyl 15" Gold Vein 15" Mocha 15" Natural Linen 15" White Linen	3070992 3070986 3070987 3070991 3070989	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SEND CUT-SHEET