

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**CALCUTTA**




COMPACT FLUORESCENT & HID

**FEATURES**

- Polycarbonate Housing w/ Textured Bronze Finish
- Cast Aluminum Back Plate
- Injection Molded Clear Polycarbonate Lens
- Aluminum Hammertone Reflector
- Fully Gasketed Channel
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Not Included
- Lamps Included
- Electronic Wattages Are CSA Listed Wet Location For Wall Mount

**0.50" Conduit Entries**  
**One on Bottom of Fixture**  
**and One on Back of Housing**

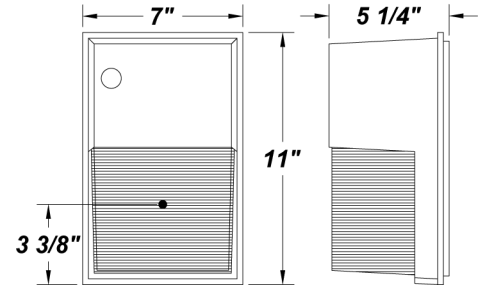

**ORDERING INFORMATION**

Example : (CA126X - 120E - 27K) Matte Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Calcutta	CA35 - (1) 35W HPS CA50 - (1) 50W HPS CA70 - (1) 70W HPS  CA113Q - (1) 13W QE CA213Q - (2) 13W QE CA118X - (1) 18W TBX CA126X - (1) 26W TBX CA132X - (1) 32W TBX CA142X - (1) 42W TBX	<u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)  (MT - Multi-Tap)  <u>FLUORESCENT (F)</u> 120E - Electronic 120V 277E - Electronic 277V 347E - Electronic 347V	Not Applicable	BZ - Bronze  <b>Note: Custom Colors Are Not Available</b>	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) PCL - Photocell F - Fused (Not Available For 347V) TP - Tamper Resistant Screws MSP - Program Start Ballast (Recommended for Motion Sensor) ***


**REPLACEMENT PARTS** PART NO.

Replacement Housing / Diffuser	6000003
--------------------------------	---------

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

\*Fluorescent Only



\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.