



**FAULTLESS LED**

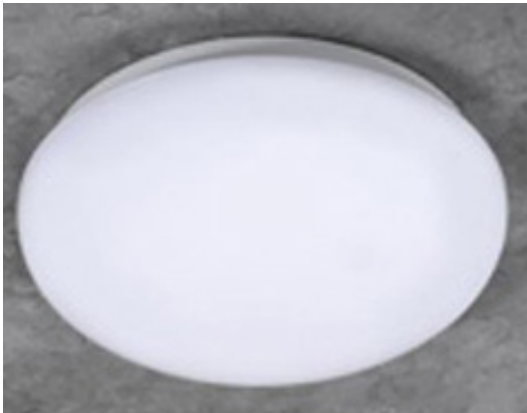

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- ADA Compliant
- CSA Listed Damp Location Wall & Ceiling (Ceiling Mount Only w/ Back Box)
- IES Files Available

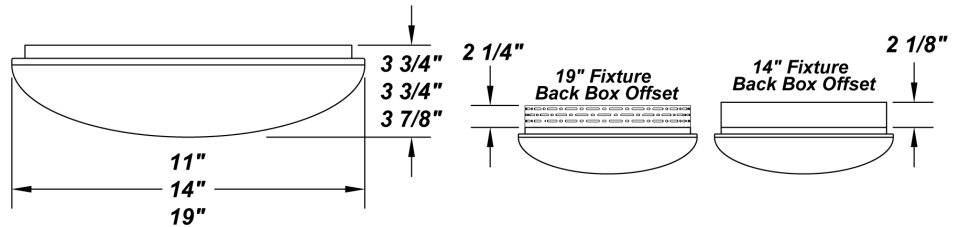

**ORDERING INFORMATION**

Example : (FS - L21.0 - ZE700 - WLL - SN - 30K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
<b>Faultless 11" Fixture</b>	L13.0 - (48) LED Array	120 - 277V (50 / 60Hz)	<b>ZE560</b> - Line Voltage 4-Wire 0-10V Dimming Driver (For L13.0 & 16.3 Only)	<b>WAL</b> - White Acrylic <b>WLL</b> - White Acrylic Formulated For LED Fixtures (11" & 14" Fixtures Only)	<b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>27K</b> - 2700K Color Temperature <b>30K</b> - 3000K Color Temperature <b>35K</b> - 3500K Color Temperature <b>40K</b> - 4000K Color Temperature <b>MSI</b> - MSI-FM105 120/277V <b>MIV</b> - 20 Watt Micro-Inverter (Remote) <b>TP</b> - Tamper-Proof Screw Set <b>F</b> - Fused <b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required) (14" & 19" Fixtures Only) - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage) <b>BB</b> - Back Box for 14" or 19" Fixture
<b>Faultless 14" Fixture</b>	L13.0 - (48) LED Array L16.3 - (60) LED Array L21.0 - (60) LED Array		<b>ZE700</b> - Line Voltage 4-Wire 0-10V Dimming Driver (For L21.0 Only)	<b>WPL</b> - White Polycarbonate	<b>RAL Colors or Custom Match - Consult Factory</b>	
<b>Eagle 19" Fixture</b>	L21.0 - (60) LED Array L30.0 - (80) LED Array L37.5 - (120) LED Array		<b>ZE1000</b> - Line Voltage 4-Wire 0-10V Dimming Driver (For L30.0 Only)  <b>ZE1050</b> - Line Voltage 4-Wire 0-10V Dimming Driver (For L37.5 Only)			

**REPLACEMENT PARTS**

**PART NO.**

11" White Acrylic Diffuser	3021160
14" White Acrylic Diffuser	3021460
19" White Acrylic Diffuser	3019960
11" White Acrylic LED Diffuser	3053260
14" White Acrylic LED Diffuser	3053360

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Faultless 11" & 14" (With WAL Standard Lens)	L13.0 - (48) LED Array - Constant Current @560mA - 15.0 Input Watts  50,000 Hours(L70)	<b>13.0 LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 1700 LED Source Lumens - 105 LED Source Lumens Per Watt - 979 Delivered LED Lumens - 65.3.6 Delivered LED Lumens Per Watt
		<b>16.3W LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 2110 LED Source Lumens - 103 LED Source Lumens Per Watt - 1447 Delivered LED Lumens - 76.2 Delivered LED Lumens Per Watt
Faultless 14" (With WAL Standard Lens)	L16.3 - (60) LED Array - Constant Current @560mA - 19.0 Input Watts  50,000 Hours(L70)	<b>16.3W LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 2110 LED Source Lumens - 103 LED Source Lumens Per Watt - 1447 Delivered LED Lumens - 76.2 Delivered LED Lumens Per Watt
Faultless 14" & 19" (With WAL Standard Lens)	L21.0 - (60) LED Array - Constant Current @700mA - 24.0 Input Watts  50,000 Hours(L70)	<b>21.0W LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 2640 LED Source Lumens - 105 LED Source Lumens Per Watt - 1737 Delivered LED Lumens - 72.4 Delivered LED Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Faultless 19" (With WAL Standard Lens)	L37.5 - (108) LED Array - Constant Current @1050mA - 36.0 Input Watts  50,000 Hours(L70)	<b>37.5W LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 4845 LED Source Lumens - 135.4 LED Source Lumens Per Watt - 2879 Delivered LED Lumens - 80 Delivered LED Lumens Per Watt
		<b>30.0W LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 4522 LED Source Lumens - 134 LED Source Lumens Per Watt - 2534 Delivered LED Lumens - 74.5 Delivered LED Lumens Per Watt
Faultless 19" (With WAL Lens)	L30.0 - (80) LED Array - Constant Current @1000mA - 34.0 Input Watts  50,000 Hours(L70)	<b>30.0W LED ARRAY</b> <b>30K - 3000K Color Temp.</b> - 80 CRI Typ. - 4522 LED Source Lumens - 134 LED Source Lumens Per Watt - 2534 Delivered LED Lumens - 74.5 Delivered LED Lumens Per Watt

All Wattages Listed on This Page Have IES Files Available For the 30K Color Temperature

