

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


GOLD CUP MD



COMPACT FLUORESCENT & HID

FEATURES

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- Ribbed Borosilicate Glass Diffuser
- Fully Gasketed
- Stainless Steel Zinc-Coated Screws
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Cast-In Template
- Lamps Included
- Integral EM Battery Available
- CSA Listed For Wall Mounting

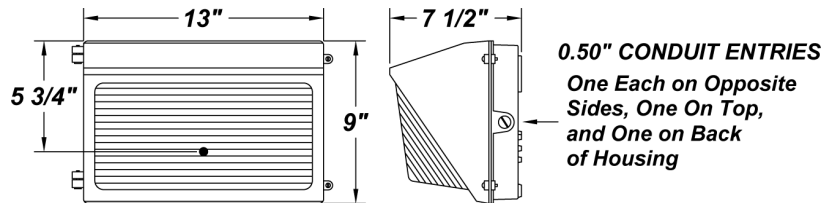

ORDERING INFORMATION

Example : (GPM100MH - 120H)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Gold Cup Md	<p>GPM50MH - 50W MH GPM70MH - 70W MH GPM100MH - 100W MH</p> <p>GPM50 - 50W HPS GPM70 - 70W HPS GPM100 - 100W HPS</p> <p>GPM132X - (1) 32W TBX GPM142X - (1) 42W TBX GPM226X - (2) 26W TBX GPM232X - (2) 32W TBX</p>	<p><u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - MT HPF (Wired 347V)</p> <p><u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)</p> <p>(MT - Multi-Tap)</p> <p><u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic</p>	Not Applicable	<p>SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White</p> <p>RAL Colors or Custom Match - Consult Factory</p>	<p>41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard)</p> <p>F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast* (Electronic Only) QRS - Quartz Restrike (DC/Bay - Lamp Included) QZS - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed) ** LXS - Polycarbonate Lexan Lens Shield W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum) WGD - Wire Guard MSP - Program Start Ballast (Recommended for Motion Sensor) ***</p>

REPLACEMENT PARTS

PART NO.

Ribbed Borosilicate Glass Diffuser	37127
Internal Visor (Please Specify Color When Ordering)	5300799

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

- EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
- EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F
- EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.