

# EAGLE LED 14"

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- Energy Star Listed
- Emergency Battery Available Available
- IES Files Available
- LED Light Fixture
- L70 Life time for 60,000hr
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish



## LINE DRAWING

LINE DRAWING NOT TO SCALE

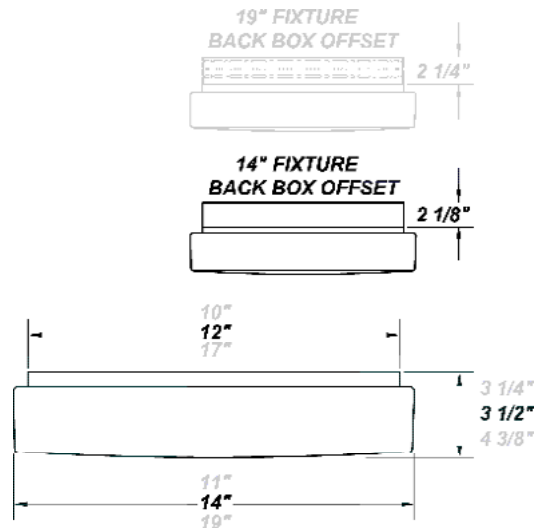


## FINISHES


Antique Copper




Antique Silver




Bronze Mist




Gloss White




Matte Silver



Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# EAGLE LED 14"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE14 - Eagle 14"	<b>L13.5-ZE420</b> - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L17.0-ZE530</b> - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V - 277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
EE14	L13.0-ZE530	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>WH</b> - Gloss White (Standard) <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>ALP</b> - Aluminum Mount Pan w/ White Finish <b>BB</b> - Back Box*** <b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** <b>F</b> - Fused <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit <b>TP</b> - Tamper-Proof Screw Set <b>WLL</b> - LED High Lumen Lens <b>WPL</b> - White Polycarbonate
ORDER INFO			
Not Applicable	WH	30K	ALP

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	30K SPECS
EE 14"	L13.5	<ul style="list-style-type: none"> <li>WAL Lens</li> <li>80 CRI Typ.</li> <li>3000K Color Temp</li> <li>2100 LED Source Lumens</li> <li>155.5 LED Source Lumens Per Watt</li> <li>1071 Delivered LED Lumens</li> <li>71.6 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WLL Lens</li> <li>80 CRI Typ.</li> <li>3000K Color Temp</li> <li>2100 LED Source Lumens</li> <li>155.5 LED Source Lumens Per Watt</li> <li>1562 Delivered LED Lumens</li> <li>104.4 Delivered LED Lumens Per Watt</li> </ul>
	L17.0	<ul style="list-style-type: none"> <li>WAL Lens</li> <li>80 CRI Typ.</li> <li>3000K Color Temp</li> <li>2650 LED Source Lumens</li> <li>157 LED Source Lumens Per Watt</li> <li>1364 Delivered LED Lumens</li> <li>73.2 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WLL Lens</li> <li>80 CRI Typ.</li> <li>3000K Color Temp</li> <li>2650 LED Source Lumens</li> <li>157 LED Source Lumens Per Watt</li> <li>2065 Delivered LED Lumens</li> <li>110.7 Delivered LED Lumens Per Watt</li> </ul>

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3011560	**AC Mode 960 Lumens
14" White Acrylic LED Diffuser	3053160	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		***Not CSA Damp Location Listed for Wall Mount Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# EAGLE LED 14"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE14 - Eagle 14"	L20.5-ZE640 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V - 277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
EE14	L20.5-ZE640	120-277V	ZE

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>WH</b> - Gloss White (Standard) <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>ALP</b> - Aluminum Mount Pan w/ White Finish <b>BB</b> - Back Box*** <b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** <b>F</b> - Fused <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit <b>TP</b> - Tamper-Proof Screw Set <b>WLL</b> - LED High Lumen Lens <b>WPL</b> - White Polycarbonate
ORDER INFO			
Not Applicable	WH	30K	ALP

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	30K SPECS
EE 14"	L20.5	<ul style="list-style-type: none"> <li>• WAL Lens</li> <li>• 80 CRI Typ.</li> <li>• 30K - 3000K Color Temp</li> <li>• 3100 LED Source Lumens</li> <li>• 151 LED Source Lumens Per Watt</li> <li>• 2478 Delivered LED Lumens</li> <li>• 102.8 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>• WLL Lens</li> <li>• 80 CRI Typ.</li> <li>• 30K - 3000K Color Temp</li> <li>• 3100 LED Source Lumens</li> <li>• 151 LED Source Lumens Per Watt</li> <li>• 2478 Delivered LED Lumens</li> <li>• 102.8 Delivered LED Lumens Per Watt</li> </ul>

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3011560	**AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
14" White Acrylic LED Diffuser	3053160	
		***Not CSA Damp Location Listed for Wall Mount  Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.