

EAGLE LED 19"

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L21.0 & L37.5)
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L30.0)
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- Emergency Battery Available
- LED Light Fixture
- L70 Life time for 60,000hr (L20.5 only)
- Mounting Hardware Included



LINE DRAWING

LINE DRAWING NOT TO SCALE

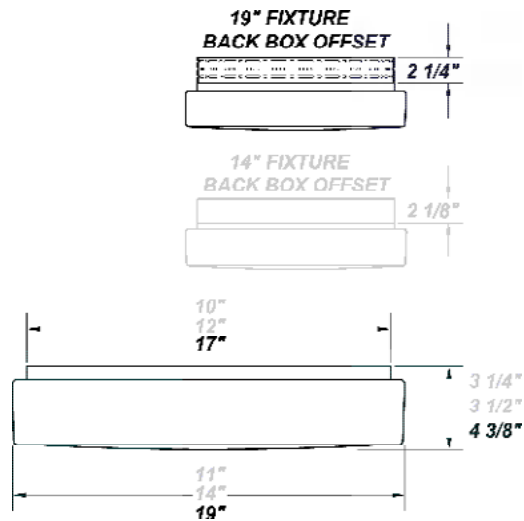


FINISHES


Antique
Copper




Antique
Silver




Bronze
Mist




Gloss
White




Matte
Silver




Sand




Swedish
Steel




Textured
Black



Textured
Bronze



Textured
White



For RAL Colors
& Custom
Match -
Contact Teron
Lighting Inc.

EAGLE LED 19"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE19 - Eagle 19"	L21.0-ZE550 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L28.5-ZE750 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-270V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
EE19	L20.5-ZE640	120-277V	ZE

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan w/ White Finish BB - Back Box*** EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector (37.5 Only) STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WLL - LED High Lumen Lens
ORDER INFO			
Not Applicable	AC	27K	ALP

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	30K SPECS
EE 19"	L21.0	<ul style="list-style-type: none"> WAL Lens 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> WLL Lens 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt
	L28.5	<ul style="list-style-type: none"> WAL Lens 80 CRI Typ. 30K - 3000K Color Temp 4100 LED Source Lumens 144 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> WLL Lens 80 CRI Typ. 30K - 3000K Color Temp 4100 LED Source Lumens 144 LED Source Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3011960	**AC Mode 960 Lumens
19" White Acrylic LED Diffuser	3067560	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		***Not CSA Damp Location Listed for Wall Mount Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

EAGLE LED 19"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE19 - Eagle	L37.5-ZE1050 - (120) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-270V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
EE	L37.5-ZE1050	120-277V	ZE

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan w/ White Finish BB - Back Box*** EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector (37.5 Only) STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WLL - LED High Lumen Lens
ORDER INFO			
Not Applicable	AC	27K	ALP

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	30K SPECS			
EE 19"	L37.5	<ul style="list-style-type: none"> • WAL Lens • 80 CRI Typ. • 30K - 3000K Color Temp • 4845 LED Source Lumens • 135.4 LED Source Lumens Per Watt • 3843 Delivered LED Lumens • 107.4 Delivered LED Lumens Per Watt 	<ul style="list-style-type: none"> • WLL Lens • 80 CRI Typ. • 30K - 3000K Color Temp • 4845 LED Source Lumens • 135.4 LED Source Lumens Per Watt • 3720 Delivered LED Lumens • 103.9 Delivered LED Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3011960	**AC Mode 960 Lumens
19" White Acrylic LED Diffuser	3067560	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		***Not CSA Damp Location Listed for Wall Mount Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.