

# FAULTLESS LED 14"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included




## LINE DRAWING

LINE DRAWING NOT TO SCALE

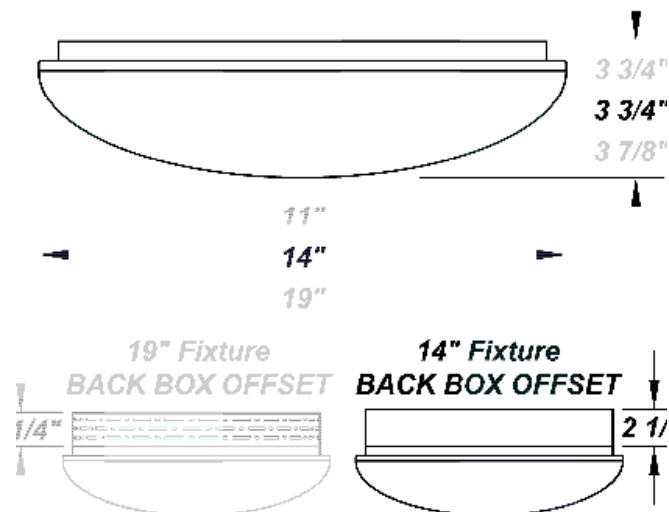

## FINISHES

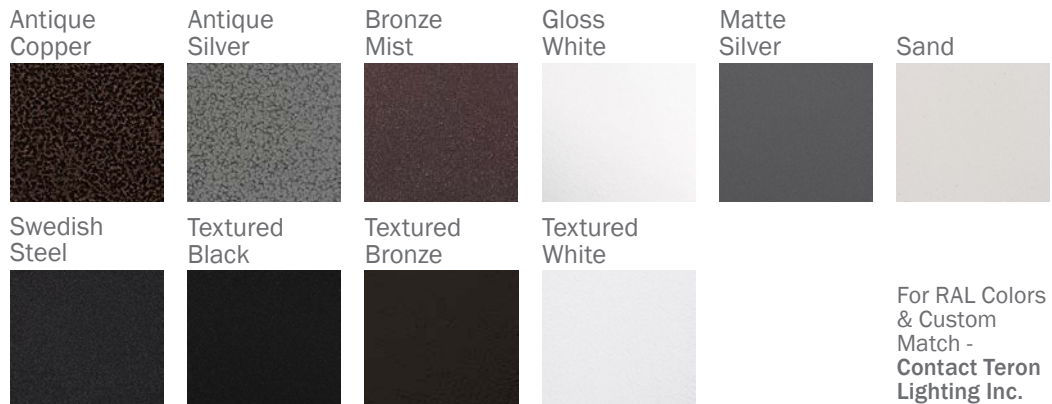

# FAULTLESS LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FS - Faultless	<b>L16.3-ZE530</b> - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L21.0-ZE700</b> - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120V</b> <b>277V</b> (50 / 60Hz)	Not Applicable
ORDER INFO			
FS	L16.3-ZE530	120V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>WH</b> - Gloss White (Standard) <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>ALP</b> - Aluminum Mount Pan <b>BB</b> - Back Box <b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** <b>F</b> - Fused <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit <b>TP</b> - Tamper-Proof Screw Set <b>WLL</b> - LED High Lumen Lens <b>WPL</b> - White Polycarbonate
ORDER INFO			
Not Applicable	AC	30K	ALP
Example ^			

PROD	SOURCE	30K SPECS				
FS 14"	L16.3	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2650 LED Source Lumens</li> <li>157 LED Source Lumens Per Watt</li> <li>1242 Delivered LED Lumens</li> <li>76.2 Delivered LED Lumens Per Watt</li> </ul>				
	L21.0	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>3100 LED Source Lumens</li> <li>151 LED Source Lumens Per Watt</li> <li>1520 Delivered LED Lumens</li> <li>72.4 Delivered LED Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3021460	**AC Mode 960 Lumens
14" White Acrylic LED Diffuser	3053360	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.