

FAULTLESS LED 19"

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L21.0 & L37.5)
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L30.0)
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included




LINE DRAWING

LINE DRAWING NOT TO SCALE

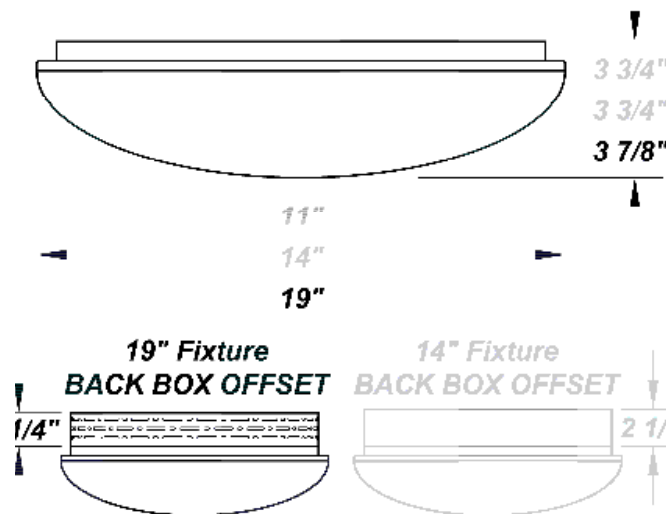

FINISHES

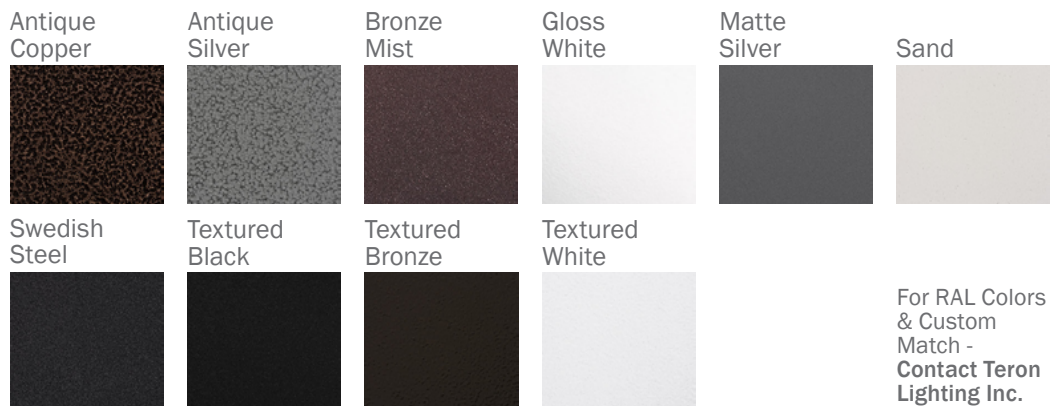

FAULTLESS LED 19"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | TRIM | SOURCE/WATTAGE | DIMMING DRIVER |
|-----------------|----------------|---|--------------------|
| FS - Faultless | Not Applicable | L21.0 - 21W L30.0 - 30W L37.5 - 37.5W | ZE - 0-10V Dimming |
| ORDER INFO | | | |
| FS Example ^ | L20.5-ZE640 | L21.0 | Not Applicable |

Aesthetics & Options

| VOLTAGE | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|---|
| UNV (50 / 60Hz) | AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | ALP - Aluminum Mount Pan BB - Back Box EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic WPL - White Polycarbonate |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 30K | ALP |

| PROD | SOURCE | 30K SPECS | | | | |
|--------|--------|--|--|--|--|--|
| FS 19" | L21.0 | <ul style="list-style-type: none"> 80 CRI Typ. 1737 Delivered LED Lumens 72.4 Delivered LED Lumens Per Watt | | | | |
| | L30.0 | <ul style="list-style-type: none"> 80 CRI Typ. 2534 Delivered LED Lumens 74.5 Delivered LED Lumens Per Watt | | | | |
| | L37.5 | <ul style="list-style-type: none"> 80 CRI Typ. 2879 Delivered LED Lumens 80 Delivered LED Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------------------|---------|--|
| 19" White Acrylic Diffuser | 3019960 | **AC Mode 960 Lumens |
| 19" White Acrylic LED Diffuser | 3069160 | Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage) |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.