

FAULTLESS LED 19"

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES


- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L30.0 Only)
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included



LINE DRAWING

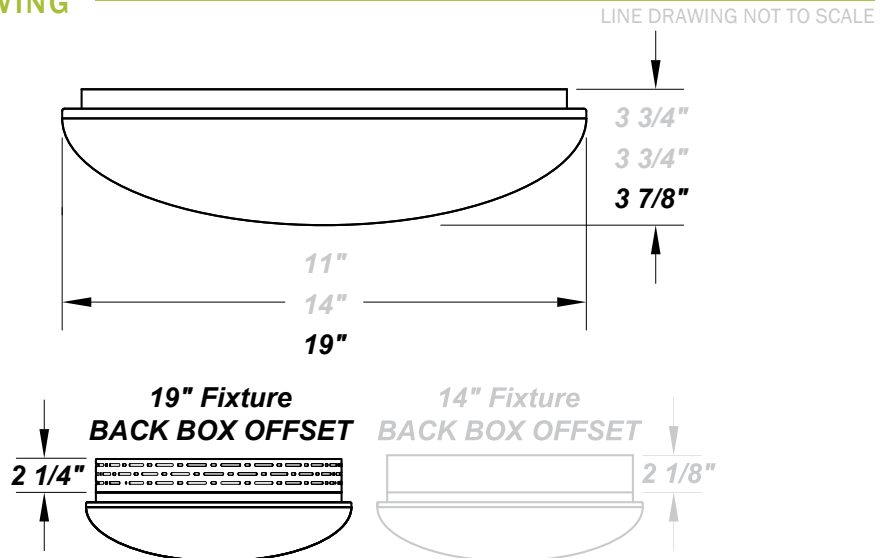

FINISHES

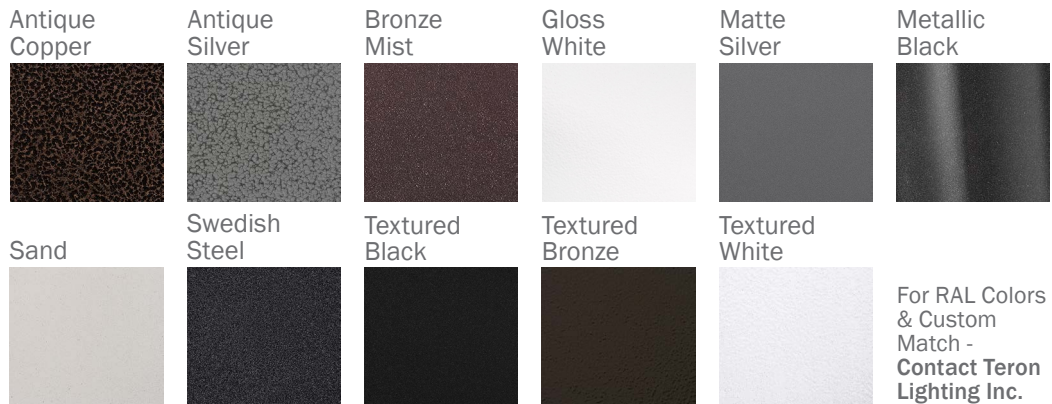

FAULTLESS LED 19"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FS - Faultless	L21.0-ZE700 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L30.0-ZE1000 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
FS Example ^	L21.0-ZE700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	ALP - Aluminum Mount Pan BB - Back Box EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector TP - Tamper-Proof Screw Set WAL - White Acrylic WPL - White Polycarbonate
ORDER INFO			
Not Applicable Example ^	AC	27K	ALP

PROD	SOURCE	30K SPECS			
FS 19"	L21.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 2640 LED Source Lumens 105 LED Source Lumens Per Watt 1737 Delivered LED Lumens 72.4 Delivered LED Lumens Per Watt 			
	L30.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 4522 LED Source Lumens 134 LED Source Lumens Per Watt 2534 Delivered LED Lumens 74.5 Delivered LED Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3019960	**AC Mode 960 Lumens
19" White Acrylic LED Diffuser	3069160	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

FAULTLESS LED 19"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FS - Faultless	L37.5-ZE1050 - (120) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
FS Example ^	L37.5-ZE1050	120 - 270V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	ALP - Aluminum Mount Pan BB - Back Box EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector TP - Tamper-Proof Screw Set WAL - White Acrylic WPL - White Polycarbonate
ORDER INFO			
Not Applicable Example ^	AC	27K	ALP

PROD	SOURCE	30K SPECS				
FS 19"	L37.5	<ul style="list-style-type: none"> • 80 CRI Typ. • 30K - 3000K Color Temp • 4845 LED Source Lumens • 135.4 LED Source Lumens Per Watt • 2879 Delivered LED Lumens • 80 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3019960	**AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
19" White Acrylic LED Diffuser	3069160	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.