

GOLD CUP LG LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- Ribbed Borosilicate Glass Diffuser
- Fully Gasketed
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- L70 Life Time For 50,000hr
- CSA Listed Wet Location For Wall Mounting
- Emergency Battery Available
- LED Light Fixture




LINE DRAWING

LINE DRAWING NOT TO SCALE

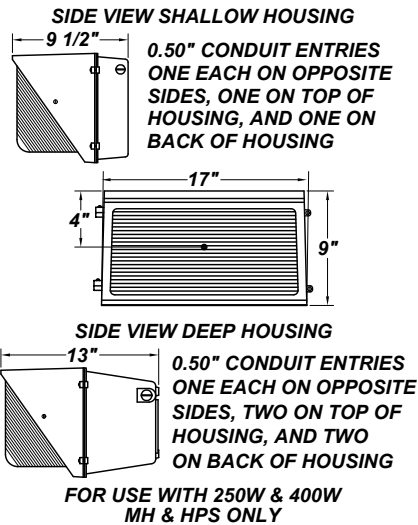

FINISHES

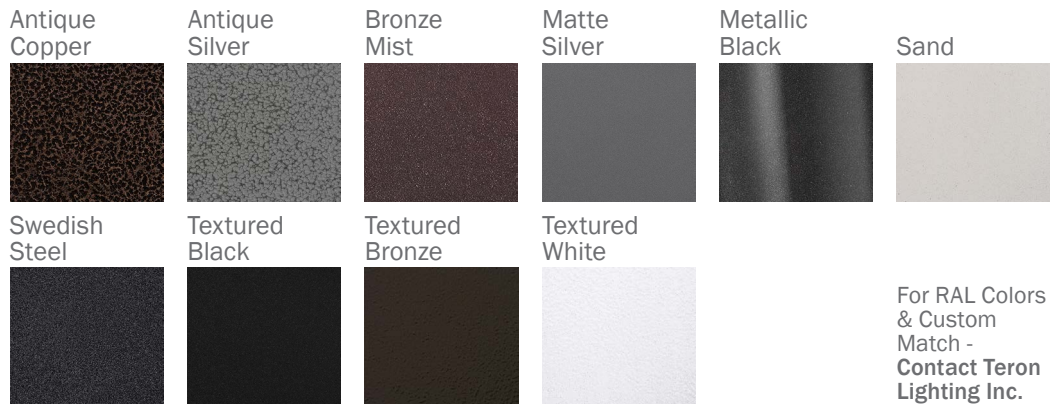

GOLD CUP LG LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
GPL - Gold Cup LG	L48.0 - 48W LED Module	100 - 277V	Not Applicable
ORDER INFO			
GPL	L48.0	100 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze (Standard) TW - Textured White	40K - 4000K Color Temp 50K - 5000K Color Temp	CGL - Clear Glass Lens (Standard) DIM - Dimmable Driver (0 - 10V) PDIM - Pulse Width Dimmable Driver (0 - 10V) SDIM - Step-Dimmable Driver (Dimmable to 25% and 50%) MS - Motion Sensor (Can be Used w/ "SDIM" Option) PCL120 - Photocell 120V PCL277 - Photocell 277V LXS - Lexan Lens Shield WGD - Steel Wire Guard TP - Tamper-Proof Screw Set F - Fused EBC - 6W Integral EM Battery (-20°C) Available EBW - 5.1W Emergency Battery Available
ORDER INFO			
Not Applicable	AC	40K	CGL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	40K SPECS	50K SPECS
GPL	L48.0	<ul style="list-style-type: none"> 80 CRI Typ. 40K - 4000K Color Temp 5368 LED Source Lumens 111.8 LED Source Lumans Per Watt 	<ul style="list-style-type: none"> 80 CRI Typ. 50K - 5000K Color Temp 5650 LED Source Lumens 117.7 LED Source Lumans Per Watt

REPLACEMENT PART	PART NO	NOTES
Ribbed Borosilicate Glass Diffuser	37129	Don't see the configuration you are looking for? Call us today at (513) 858-6004
Frosted Ribbed Borosilicate Glass Diffuser	3712962	



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.