

GOLD CUP LG LED


Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- CSA Listed Wet Location For Wall Mounting
- Emergency Battery Available
- Fully Gasketed
- LED Light Fixture
- L70 Life Time For 50,000hr
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Ribbed Borosilicate Glass Diffuser

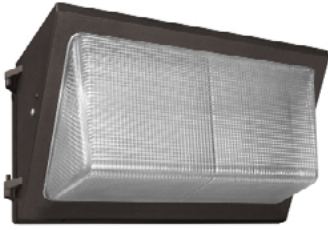


LINE DRAWING

LINE DRAWING NOT TO SCALE

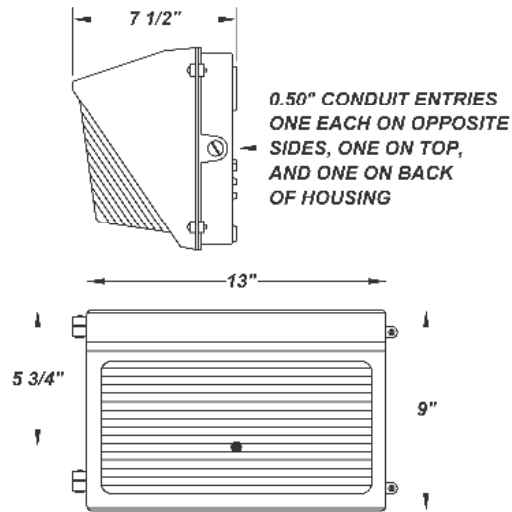


FINISHES


Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

GOLD CUP LG LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
GPL - Gold Cup LG	L48.0 - 48W LED Module	120 - 277V	SDIM - Step Dimmable Driver
ORDER INFO			
GPL	L48.0	120 - 277V	SDIM

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black	BZ - Textured Bronze (Standard) TW - Textured White 30K - 3000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	SDIM - Step-Dimmable Driver (Dimmable to 25% and 50%) PCL120 - PhotoCell 120V PCL277 - PhotoCell 277V WGD - Steel Wire Guard TP - Tamper-Proof Screw Set F - Fused EBC - 6W Integral EM Battery (-20°C) Available EBW - 5.1W Emergency Battery Available
ORDER INFO			
Not Applicable	AC	40K	CGL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	40K SPECS	50K SPECS
GPL	L48.0	<ul style="list-style-type: none"> 80 CRI Typ. 40K - 4000K Color Temp 5368 LED Source Lumens 111.8 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> 80 CRI Typ. 50K - 5000K Color Temp 5650 LED Source Lumens 117.7 LED Source Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
Ribbed Borosilicate Glass Diffuser	37129	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.