

**CITADEL W**




COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Steel Housing w/ Textured Black Polyester Powder Coat Finish
- Frosted Tempered Glass Lens Panels - 4 Sides
- Steel Fascia w/ Textured Black Polyester Powder Coat Finish
- Smooth Anodized Aluminum Reflector
- Mounts Directly to 4" Junction Box (By Others) J-Box Centered in Fixture
- Mounting Hardware Included
- Lamps Included
- ADA Compliant
- Electronic Wattages Are CSA Listed Wet Location For Wall Mount

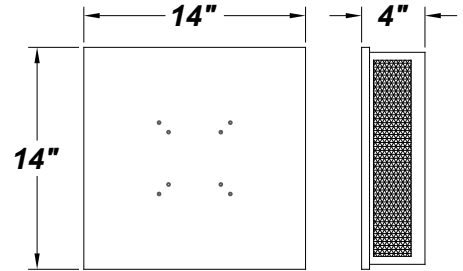

**ORDERING INFORMATION**

Example : (CTDW - F226Q - 120E - TB - 41K)

Textured Black is Standard Finish

CTDW					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Citadel W	M50 - 50W MH M70 - 70W MH S50 - 50W HPS S70 - 70W HPS S100 - 100W HPS  F218Q - (2) 18W QE F226Q - (2) 26W QE F232X - (2) 32W TBX F142X - (1) 42W TBX	<b>HID (MH &amp; HPS)</b> DTH - Dual-Tap HPF**  <b>FLUORESCENT</b> 120E - Electronic 120V 277E - Electronic 277V 347E - Electronic 347V	Not Applicable	<b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>41K</b> - 4100K Color Temp. (Standard) <b>35K</b> - 3500K Color Temp. <b>30K</b> - 3000K Color Temp. <b>27K</b> - 2700K Color Temp. <b>DIM</b> - Dimming Ballast (Electronic Only) <b>F</b> - Fused (Not Available For 347V) <b>EBR</b> - Remote Mount Battery (Field Installed)* <b>SCV</b> - Steel Side Covers (To Allow Up/Down Lighting) <b>MSP</b> - Program Start Ballast (Recommended for Motion Sensor) ***

**REPLACEMENT PARTS**

**PART NO.**

Glass Lens Panel Set	98005
Fascia (Specify Fascia Color)	5595199

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBR:**

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

**\*\*Remote Mount Ballast:**

Max Mounting Distance: MH - 20 Ft., HPS - 10 Ft.

To insure proper operation, remote HID ballasts must be vented and mounted to a heat dissipating surface.

\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

ARRA 2009



BUY AMERICA ACT