

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


## HERITAGE ROUND



## FEATURES

- Die-Cast, Marine Grade Aluminum Housing
- Injection Molded Polycarbonate Fascia w/ Weep Holes
- Translucent White Injection Molded, UV-Stabilizing Polycarbonate Diffuser
- 0.040" Aluminum Reflector Plate w/ Hi-Reflectance White Powder Coat Finish
- Extruded, EPMD Ribbed / Foam Rubber Gasketing
- Junction Box Pattern on Housing For Easy Mounting
- Lamps Included
- Integral EM Battery Available (2x26W Maximum, 1 Lamp Wired) (Deep Housing Required)
- Metal Halide (MH) Fixtures Are CSA Listed Wet Location For Wall Mount
- Electronic Wattages Are CSA Listed Wet Location For Wall Mount up to 2x42W, Including Photocell
- Electronic Wattages Are CSA Listed Wet Location For Ceiling Mount up to 2x32W, Including Photocell And For up to 2X26W, Including Photocell And Emergency Battery

0.75" CONDUIT ENTRIES  
4 TOTAL - SPACED 90 DEGREES  
AROUND SIDE OF HOUSING

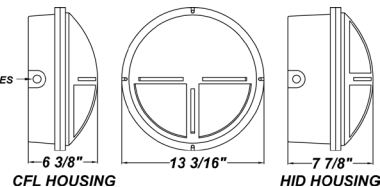

## ORDERING INFORMATION

Example : (HRT226Q - EYE - FRL -120E - BZ - 41K)

PRODUCT	SOURCE/WATTAGE	VOLTAGE	FASCIA/DIFFUSER	FINISH	OPTIONS
Heritage (Medium Housing)	HRT126Q - (1) 26W QE HRT132X - (1) 32W TBX HRT142X - (1) 42W TBX HRT218X - (2) 18W TBX HRT226X - (2) 26W TBX HRT232X - (2) 32W TBX HRT242X - (2) 42W TBX (Antron 90 Degree Blist Required for 2x42W)	<u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	CRS - Cross Guard Fascia EYE - Eyelid Guard Fascia RNG - Open Guard Fascia  WHL - White Diffuser (Standard) FRL - Frosted Ribbed Diffuser	BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws DIM - Dimming Ballast * (2x26W Maximum) EBW / EBC - Integral Emergency Battery** (2x26W Maximum) (Electronic Only) (Deep Housing Required) EBR - Remote Mount Battery (Field Installed)* DP - Deep Housing W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
Heritage (Deep Housing)	HRT50MH - 50W MH HRT70MH - 70W MH HRT100MH - 100W MH	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - 347V HPF			
Heritage (Deep Housing)	HRT50 - 50W HPS HRT70 - 70W HPS HRT100 - 100W HPS	<u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap)			

## REPLACEMENT PARTS

## PART NO.

White Polycarbonate Diffuser	3408360
Frosted Ribbed Polycarbonate Diffuser	3408362

## NOTES

### \*Fluorescent Only

### \*\*Emergency Battery Options (2x26W Maximum) (Deep Housing Required)

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

