

# CADDY MINI LED


Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Tempered Glass Lens
- Fully Gasketed
- Aluminum Heat-Sink Plate
- Mounts Direct to Flat Surface w/ Three #8 Wall Anchors (Not Included)
- 100V - 277V
- Surge Protector
- CSA Approved Wet Location For Wall Mounting (Down Light Only)
- Dark Sky Compliant
- Emergency Battery Available
- LED Light Fixture



## LINE DRAWING

LINE DRAWING NOT TO SCALE

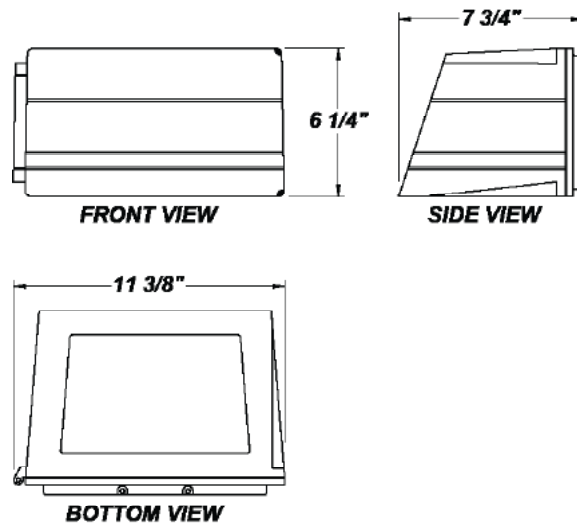

## FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Metallic Black	Sand
Swedish Steel	Textured Black	Textured Bronze	Textured White		

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# CADDY MINI LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CDM - Caddy MINI	<b>L10.0-LT300</b> - 10W @ 300mA ELV Dimming Driver <b>L12.0-LT350</b> - 12.0W @ 350mA ELV Dimming Driver <b>L18.4-12VDC</b> - 18.4W @ 12V Direct Current Driver	<b>100 - 277V</b>	<b>Not Applicable</b>
ORDER INFO			
CDM	L10.0-LT300	100 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>MB</b> - Metallic Black <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze (Standard) <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EBCA4</b> - Title 20 Compliant 4 Watt Integral Battery (L10.0 & L12.0 Only) <b>F</b> - Fused <b>FAL</b> - Frosted Acrylic Lens <b>MIV</b> - 20 Watt Micro-Inverter (Remote) <b>PCL</b> - Photocell <b>TP</b> - Tamper Resistant Screws
ORDER INFO			
Not Applicable	AC	30K	EBCA4

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
CDM	L10.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1491 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				
	L12.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1740 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				
	L18.4	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1896 LED Source Lumens</li> <li>103 LED Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
Clear Tempered Glass Lens (Standard)	37067	
Frosted Acrylic Lens	3058462	Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.