

CORNERSTONE W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Clear Tempered Glass Diffusers
- CSA Listed Wet Location
- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Emergency Battery Available
- LED Light Fixture
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Surge Protector Available



LINE DRAWING

LINE DRAWING NOT TO SCALE

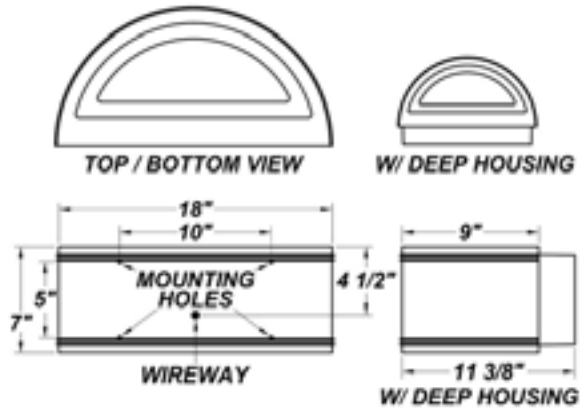

FINISHES

Antique Copper



Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

CORNERSTONE W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING
CRNW-DL - Cornerstone W Downlight or Uplight Only CRNW-UDL - Cornerstone W Uplight and Downlight	Not Applicable	L10.0 L18.0 L29.0 L42.0 (UDL Only)	ZE - 0-10V Dimming
ORDER INFO			
CRNW-DL	L Not Applicable	L29.0	ZE

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120 - 277V	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB - Integral EM Battery (Downlight) (L112.3 Only) F - Fused PCL - Photocell TP - Tamper Resistant SPD - Surge Protection Device DP - Deep Housing
ORDER INFO			
UNV	AC	30K	EB

Actual production units may vary from the values reported here by up to +/-10%

PERFORMANCE (DELIVERED LUMENS NO TRIM)

WATTAGE	3000K	LUMENS/WATT	3500K	LUMENS/WATT	4000K	LUMENS/WATT	5000K	LUMENS/WATT
L10.0	1206	113	1206	113	1243	116	1243	116
L18.0	2248	115	2248	115	2317	118	2317	118
L29.0	3061	106	3061	106	3156	109	3156	109
L42.0	4905	112	4905	112	5057	116	5057	116

ELECTRICAL DATA

WATTAGE	120V	208V	240V	277V	347V	480V
L10.0	.08A	.05A	.04A	.04A	N/A	N/A
L18.0	.17A	.10A	.08A	.07A	N/A	N/A
L29.0	.24A	.14A	.12A	.11A	N/A	N/A
L42.0	.35A	.20A	.18A	.15A	N/A	N/A

REPLACEMENT PART	PART NO	NOTES
Black Glass Lens	3702824	
Clear Glass Lens	37028	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.