

# CORNERSTONE W UDL LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Up/Down Light
- Clear Tempered Glass Diffusers
- Constant Voltage Modules (Excluding L42.0)
- CSA Listed Wet Location
- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- LED Light Fixture
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Surge Protector
- Thermal Compensation Technology Ensures Longer LED Lifetime - Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures




## LINE DRAWING

LINE DRAWING NOT TO SCALE

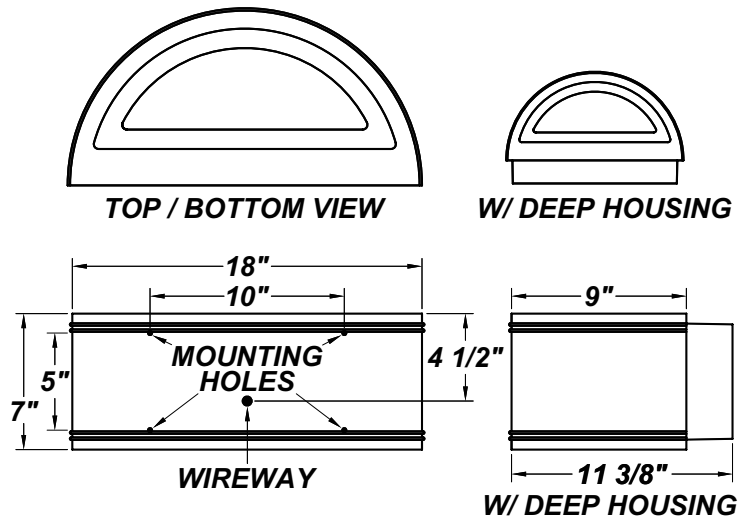

## FINISHES

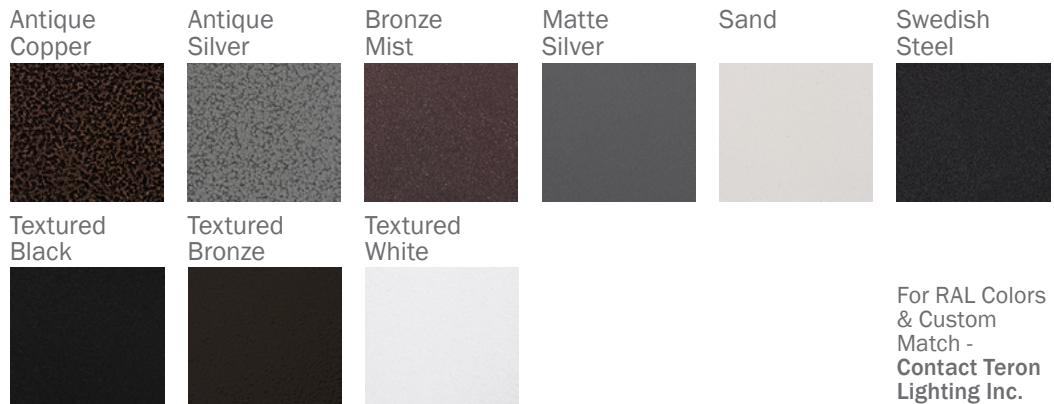

# CORNERSTONE W UDL LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>CRNW</b> - Cornerstone W Up Down Light	<b>L32.0-12CV</b> - 32W @ 12V Constant Voltage Non-Dimming Driver <b>L42.0-ZE1100</b> - 42W @ 1100mA Constant Current 0-10V Dimming Driver	<b>120 - 277V</b>	<b>Not Applicable</b>  <b>(Dimmable 0-10V)</b>
ORDER INFO			
CRNW	L218.1-ZE1100	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>UDL</b> - Up Down Light	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black (Standard) <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>DH</b> - Deep Housing <b>PCL</b> - Photocell
ORDER INFO			
UDL	AC	30K	DH

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
<b>CRNW</b>	L32.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>5465 LED Source Lumens</li> <li>151 LED Source Lumens Per Watt</li> <li>4132 Delivered LED Lumens</li> <li>98.4 Delivered LED Lumens per Watt</li> </ul>				
	L42.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2528 LED Source Lumens</li> <li>78 LED Source Lumens Per Watt</li> <li>2355 Delivered LED Lumens</li> <li>70.4 Delivered Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
Black Glass Lens	3702824	Take Lumens Data and Divide Output By Two to Determine Amount of Light on Each Side.
Clear Glass Lens	37028	

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# CORNERSTONE W UDL LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>CRNW</b> - Cornerstone W Up Down Light	<b>L56.0-ZE12V</b> - 56W @ 0-10V Constant Voltage 0-10V Dimming Driver <b>L64.0-12CV</b> - 64W @ 12V Constant Voltage Non-Dimming Driver	<b>120 - 277V</b>	<b>(Dimmable 0-10V)</b>  <b>Not Applicable</b>
ORDER INFO			
CRNW	L56.0-ZE12V	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>UDL</b> - Up Down Light	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black (Standard) <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>DH</b> - Deep Housing <b>PCL</b> - Photocell
ORDER INFO			
UDL	AC	30K	DH

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
<b>CRNW</b>	L56.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4424 LED Source Lumens</li> <li>102.9 LED Source Lumens Per Watt</li> <li>4057 Delivered LED Lumens</li> <li>72.4 Delivered LED Lumens Per Watt</li> </ul>			
	L64.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>5056 LED Source Lumens</li> <li>102.1 LED Source Lumens Per Watt</li> <li>4796 Delivered LED Lumens</li> <li>74.9 Delivered LED Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
Black Glass Lens	3702824	Take Lumens Data and Divide Output By Two to Determine Amount of Light on Each Side.
Clear Glass Lens	37028	

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.