

DUNLOP LED 48"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Die-Formed Cold-Rolled Steel End Caps w/ Brushed Nickel Plated Finish
- Steel Housing w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Aluminum LED Mount Plate
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- CSA Listed Damp Location For Surface Mount
- Emergency Battery Available
- LED Light Fixture
- Vandal Resistant




LINE DRAWING

LINE DRAWING NOT TO SCALE

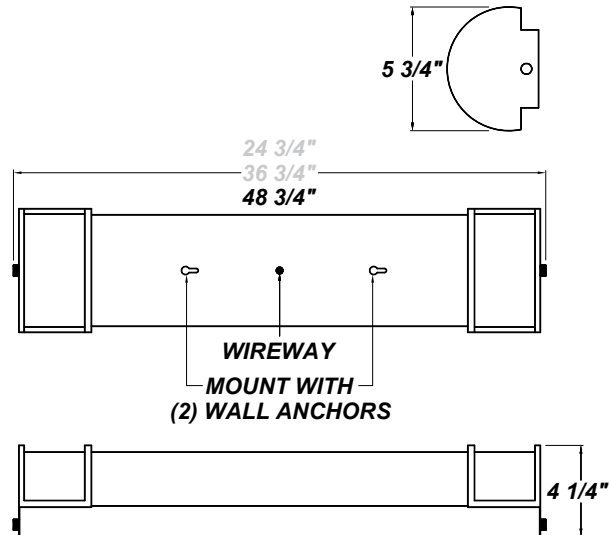

FINISHES

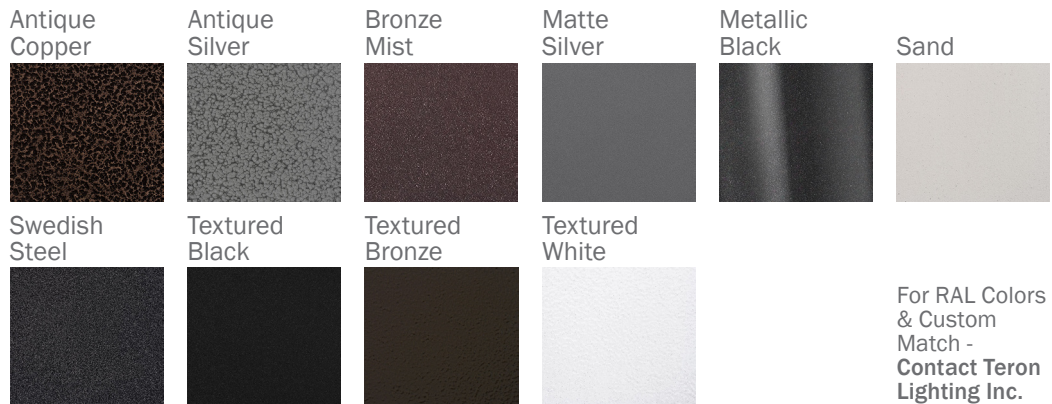

DUNLOP LED 48"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
DP48 - Dunlop 48"	L24.0-TE350 - 24.0W @ 350mA ELV Dimming Driver L36.0-TE500 - 36W @ 500mA ELV Dimming Driver L36-ZE1000 - 36W @ 500mA 0-10V Dimming Driver L41.2-ZE1200 - 41.2W @ 1200mA 0-10V Dimming Driver	120V 277V (120-230V Dimmable)	Not Applicable
ORDER INFO			
DP48 Example ^	L24.0-TE350	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel Plate (Standard) MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	EB - 5.1W Intergral EM Battery F - Fused TP - Tamper Resistant
ORDER INFO			
Not Applicable Example ^	AC	30K	EB

PROD	SOURCE	30K SPECS				
DNB 48"	L24.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2800 LED Source Lumens 100 LED Source Lumens Per Watt 				
	L36.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3972 LED Source Lumens 99 LED Source Lumens Per Watt 				
	L41.2	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5578 LED Source Lumens 129.7 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
48" White Acrylic LED Lens Assembly	38202	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.