

# HERITAGE OVAL RNG LED

Architectural Outdoor



|           |      |
|-----------|------|
| PROJECT:  |      |
| TYPE:     |      |
| PO#:      | QTY: |
| COMMENTS: |      |


## FEATURES

- Die-Cast, Marine Grade Aluminum Housing
- Injection Molded Polycarbonate Fascia w/ Weep Holes
- Translucent White Injection Molded
- UV-Stabilizing Polycarbonate Diffuser
- 0.040" Aluminum Reflector Plate w/ Hi-Reflectance White Powder Coat Finish
- Extruded, EPMD Ribbed / Foam Rubber Gasketing
- Junction Box Pattern on Housing For Easy Mounting
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal, For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Surge Protector
- CSA Listed Wet Location For Wall or Ceiling Mount



## LINE DRAWING

LINE DRAWING NOT TO SCALE

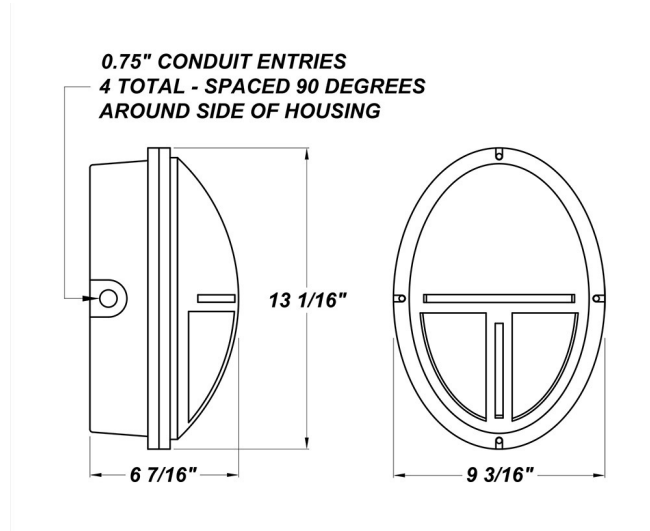

## FINISHES

For RAL Colors  
& Custom  
Match -  
Contact Teron  
Lighting Inc.

# HERITAGE OVAL RNG LED

Architectural Outdoor



Fixture Core

|           |      |
|-----------|------|
| PROJECT:  |      |
| TYPE:     |      |
| PO#:      | QTY: |
| COMMENTS: |      |

| PRODUCT CODE        | SOURCE/WATTAGE  | VOLTAGE                          | DIMMING DRIVER        |
|---------------------|---|----------------------------------|-----------------------|
| HRO - Heritage Oval | <b>12.3</b> - (4) 3.066W<br>ThermAdjust LED Strips<br><b>L24.5</b> - (8) 3.066W<br>ThermAdjust LED Strips | <b>100 - 277V</b><br>(50 / 60Hz) | <b>Not Applicable</b> |
| ORDER INFO          |   |                                  |                       |
| HRO                 | L12.3   | 100 - 277V                       | Not Applicable        |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM       | FINISH   | COLOR TEMP  | OPTIONS   |
|------------|--|---|---|
| RNG        | <b>BK</b> - Matte Black<br><b>BZ</b> - Matte Bronze<br><b>WH</b> - Matte White<br><b>TI</b> - Matte Titanium | <b>27K</b> - 2700K Color Temp<br><b>30K</b> - 3000K Color Temp<br><b>35K</b> - 3500K Color Temp<br><b>40K</b> - 4000K Color Temp<br><b>50K</b> - 5000K Color Temp | <b>F</b> - Fused<br><b>FRL</b> - Frosted Ribbed Lens<br><b>PCL120</b> - 120V Photocell<br><b>PCL277</b> - 277V Photocell<br><b>TP</b> - Tamper Resistant Screws |
| ORDER INFO |  |   |   |
| RNG        | BK   | 27K   | F   |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS  |  |  |  |
|------|--------|--|--|--|--|
| HRO  | L12.3  | <ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1264 LED Source Lumens</li> <li>102.8 LED Source Lumens Per Watt</li> </ul> |  |  |  |
|      | L24.5  | <ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2528 LED Source Lumens</li> <li>103.2 LED Source Lumens Per Watt</li> </ul> |  |  |  |

| REPLACEMENT PART                      | PART NO | NOTES                          |
|---------------------------------------|---------|--------------------------------|
| White Ribbed Polycarbonate Diffuser   | 3408660 | White Ribbed is standard lens. |
| Frosted Ribbed Polycarbonate Diffuser | 3408662 |                                |

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.