

NIKE C LED 17"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- ADA Compliant
- CSA Listed Damp Location for Ceiling and Wall Mount
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available
- IES Files Are Available
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



LINE DRAWING

LINE DRAWING NOT TO SCALE

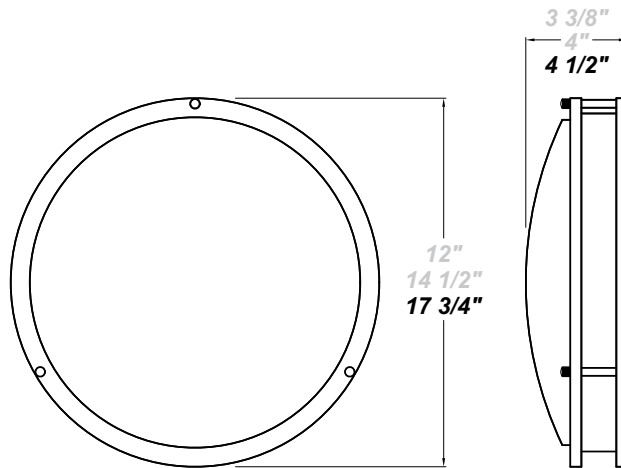

FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE C LED 17"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC18 - Nike C 18"	L21.0-ZE700 - (60) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L30.0-ZE1000 - (60) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NEC18 Example ^	L21.0-ZE700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze BN - Brushed Nickel (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits SP - Surge Protector
ORDER INFO			
Not Applicable Example ^	AC	30K	BB

PROD	SOURCE	30K SPECS				
NEC18	L21.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2640 LED Source Lumens 105 LED Source Lumens Per Watt 1861 Delivered LED Lumens 77.4 Delivered LED Lumens Per Watt 				
	L30.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4522 LED Source Lumens 134 LED Source Lumens Per Watt 2134 Delivered LED Lumens 62.7 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NIKE C LED 17"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC18 - Nike C 18"	L37.5-ZE1050 - (120) LED Array @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NEC18 Example ^	L37.5-ZE1050	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits SP - Surge Protector
ORDER INFO			
Not Applicable Example ^	AC	30K	BB

PROD	SOURCE	30K SPECS
NEC18	L37.5	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 4845 LED Source Lumens • 135.4 LED Source Lumens Per Watt • 2596 Delivered LED Lumens • 70.2 Delivered LED Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.