

NIKE C LED 17"

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Steel Trim w/ Brushed Nickel Plated Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Are Available
- CSA Listed Damp Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included



LINE DRAWING

LINE DRAWING NOT TO SCALE

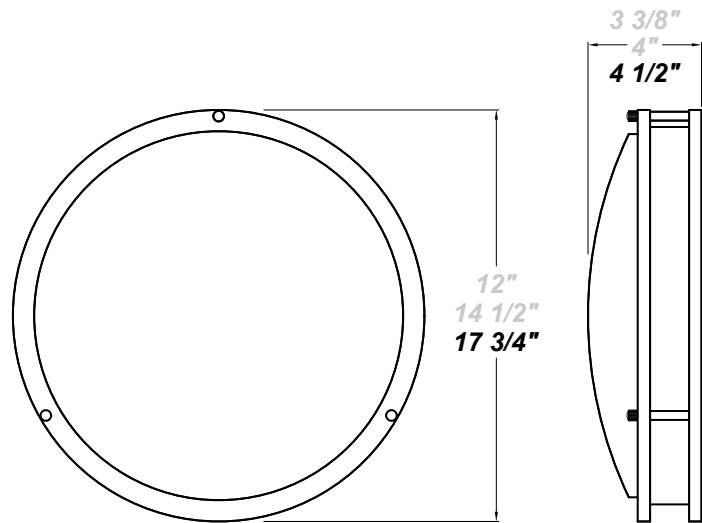

FINISHES

| | | | | | |
|----------------|----------------|-----------------|----------------|----------------|------|
| Antique Copper | Antique Silver | Bronze Mist | Matte Silver | Metallic Black | Sand |
| | | | | | |
| Swedish Steel | Textured Black | Textured Bronze | Textured White | | |
| | | | | | |

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE C LED 17"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|--------------------|--|---|----------------|
| NEC18 - Nike C 18" | L21.0-ZE700 - (60) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L30.0-ZE1000 - (60) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| NEC18 Example ^ | L21.0-ZE700 | 120V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|--|--|--|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits SP - Surge Protector |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 27K | BB |

| PROD | SOURCE | 30K SPECS | | | | |
|-------|--------|---|--|--|--|--|
| NEC18 | L21.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 2640 LED Source Lumens 105 LED Source Lumens Per Watt 1861 Delivered LED Lumens 77.4 Delivered LED Lumens Per Watt | | | | |
| | L30.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 4522 LED Source Lumens 134 LED Source Lumens Per Watt 2134 Delivered LED Lumens 62.7 Delivered LED Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|----------------------------|---------|---|
| 18" White Acrylic Diffuser | 3049760 | (All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NIKE C LED 17"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|--------------------|---|-----------------------------|----------------|
| NEC18 - Nike C 18" | L37.5-ZE1050 - (120) LED Array @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| NEC18 Example ^ | L37.5-ZE1050 | 120V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|--|--|--|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits SP - Surge Protector |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 27K | BB |

| PROD | SOURCE | 30K SPECS | | | | |
|-------|--------|---|--|--|--|--|
| NEC18 | L37.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 4845 LED Source Lumens 135.4 LED Source Lumens Per Watt 2596 Delivered LED Lumens 70.2 Delivered LED Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|----------------------------|---------|---|
| 18" White Acrylic Diffuser | 3049760 | (All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.