

TALON W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Tempered Glass Diffuser
- 50% Up / 50% Down Standard Light Distribution
- Stainless Steel Hex-Head Screws
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- 120 - 277V
- Surge Protector
- CSA Listed Wet Location For Wall Mounting
- Emergency Battery Available
- LED Light Fixture




LINE DRAWING

LINE DRAWING NOT TO SCALE

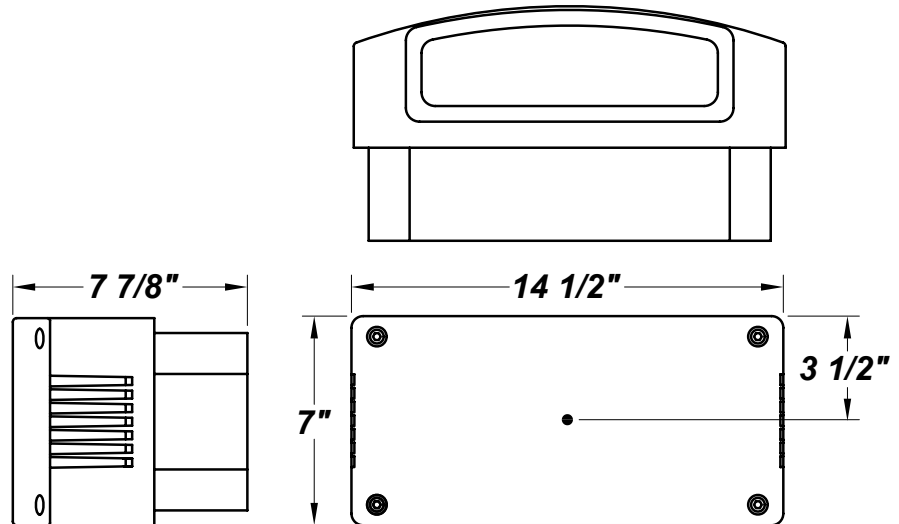

FINISHES

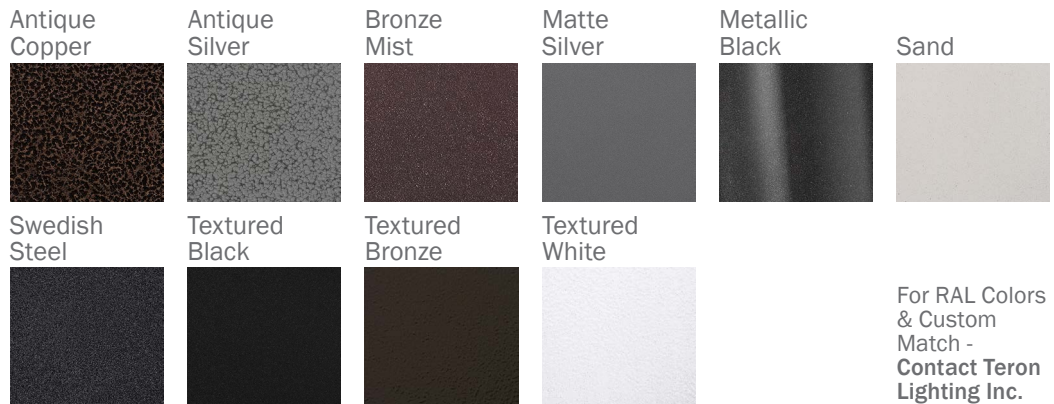

TALON W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TLNW - Talon W	L112.3-12CV - (4) 3.06W ThermAdjust LED Modules @ 12V Constant Current (Non-Dimmable) L212.3-12CV - (8) 3.06W ThermAdjust LED Modules (4 Per Side) @ 12V Constant Current (Non-Dimmable)	120 - 277V (50 / 60Hz) (L115.3 & L218.1 Are Dimmable From 120 - 277V)	Not Applicable
ORDER INFO			
TLNW	L112.3-12CV	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black (Standard) AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver MB - Metallic Black TW - Textured White SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	PCL120 - Photocell 120V PCL277 - Photocell 277V UL - Uplight (L112.3 & L115.3 Only) DL - Downlight (L112.3 & L115.3 Only) EB - Integral Emergency Battery (Please Specify Voltage For EB)
ORDER INFO			
Not Applicable	AC	30K	PCL120

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
TLNW	L112.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1264 LED Source Lumens 103 LED Source Lumens Per Watt 			
	L212.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2528 LED Source Lumens 103 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Clear Glass Lens	37966	
Black Glass Lens	3796624	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

TALON W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TLNW - Talon W	L115.3-12CV - (5) 3.06W ThermAdjust LED Modules @ 12V Constant Current 4-Wire Dimming Driver (Dimmable 0 - 10V) L218.1.0-ZE1100 - (4) LED Strips (Two Per Side) @ 100mA 4-Wire Dimming Driver (Dimmable 0 - 10V)	120 - 277V (50 / 60Hz) (L115.3 & L218.1 Are Dimmable From 120 - 277V)	Not Applicable
ORDER INFO			
TLNW	L115.3-12CV	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black (Standard) AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver MB - Metallic Black TW - Textured White SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	PCL120 - Photocell 120V PCL277 - Photocell 277V UL - Uplight (L112.3 & L115.3 Only) DL - Downlight (L112.3 & L115.3 Only) EB - Integral Emergency Battery (Please Specify Voltage For EB)
ORDER INFO			
Not Applicable	AC	35K	PCL120

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
TLNW	L115.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1580 LED Source Lumens 103 LED Source Lumens Per Watt 			
	L218.1	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3478 LED Source Lumens 96.1 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Clear Glass Lens	37966	
Black Glass Lens	3796624	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.